


# Microinverter

SUN-M30/40/50G3-EU-Q0



IP67 protection degree, 10 years warranty

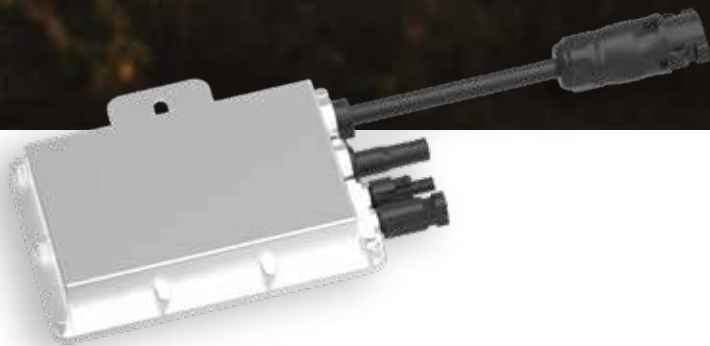

1 MPP tracker, module level monitoring



WIFI communication



Rapid shutdown function

**Deye**

Stock Code: 605117.SH

Model	SUN-M30G3-EU-Q0	SUN-M40G3-EU-Q0	SUN-M50G3-EU-Q0
<b>Input Data (DC)</b>			
Recommended Input Power (STC)	210-420W (1 Piece)	210-560W (1 Piece)	210-700W (1 Piece)
Maximum Input DC Voltage (V)	60		
MPPT Voltage Range (V)	25-55		
Full Load DC Voltage Range (V)	30-55	33-55	40-55
Max. DC Short Circuit Current (A)	19.5		
Max. Input Current (A)	13		
No.of MPP Trackers	1		
No.of Strings per MPP Tracker	1		
<b>Output Data (AC)</b>			
Max. Output Apparent Power (VA)	300	400	500
Rated Output Power (W)	300	400	500
Rated Output Current (A)	1.4/1.4	1.9/1.8	2.3/2.2
Max.AC Output Current(A)	1.4/1.4	1.9/1.8	2.3/2.2
Grid Connection Form Rated output voltage/range (V)	L+N+PE 220V/184V-242V 230V/ 195.5V-253V		
Rated Grid Frequency/range(Hz)	50Hz/45Hz-55Hz 60Hz/55Hz-65Hz		
Power Factor Adjustment Range	>0.99		
Current Harmonic Distortion THDi	<3%		
DC Component Of Grid	<0.5%In		
Maximum Units per Branch	17	13	10
<b>Efficiency</b>			
Max Efficiency	96.5%		
MPPT Efficiency	>99%		
<b>Mechanical Data</b>			
Night Time Power Consumption	50mW		
Ambient Temperature Range	-40-65°C, >45°C Derating		
Cabinet Size (WxHxD mm)	144×189×31.5 (Excluding Connectors and Brackets)		
Weight (kg)	1.7		
Cooling	Free Cooling		
Enclosure Environmental Rating	IP67		
<b>Features</b>			
Communication	WIFI		
Grid Connection Standard	IEC 61727, IEC 62116, CEI 0-21, EN 50549, NRS 097, RD 140, UNE 217002, OVE-Richtlinie R25, G98, VDE-AR-N 4105		
Safety EMC / Standard	IEC/EN 61000-6-1/2/3/4, IEC/EN 62109-1, IEC/EN 62109-2		
Warranty	10 Years		