

MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE **electric** (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 0.16...0.25A

ENERGY AND AUTOMATION



Product designation			RF38
Product type designation			Motor protection
General characteristics			relay
Number of poles		Nr.	3
Overvoltage category		INI.	 III
Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse			
	aM (IEC)	Α	0.5
	RK5 (UL)	Α	1
Phase failure detection	, ,		yes
Reset mode			Manual or automatic
Power circuit characteristics			
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	6
Rated operational voltage		V	690
Operational frequency			
	min	Hz	0
	max	Hz	400
Operational current le			
	Operational current min	Α	0.16
	Operational current max	Α	0.25
Tripping class			10A
Test Button			yes
Trip indicator			yes
Terminals			
	type		screw and
			washer M4
	screw width	mm	12.6
	tool	mm	Phillips 2
Tightening torque for terminals	1001		T Tillipa Z
rightering torque for terminals	min	Nm	2
	max	Nm	2.5
	min	lbin	1.5
	max	Ibin	1.8
Conductor section	····		
	Flexible w/o lug max	mm²	10
	Flexible c/w lug max	mm²	6
	AWG/kcmil max		8
Auxiliary circuit characteristics			

Auxiliary contacts



MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE

electric (THREE-PHASE)	, MANUAL OR AUTOMATIC RESETTING.	DIRECT MOUNTING ON BF09 - BF38
ENERGY AND AUTOMATION		CONTACTORS, 0.160.25A

	NO	Nr.	1
	NC	Nr.	1
Auxiliary Rated insulation voltage Ui IEC/EN		V	690
Auxiliary Rated impulse withstand voltage Uimp		kV	6
Auxiliary Rated operational voltage		V	690
Operating current AC15			
	24V	Α	3
	120V	Α	3
	240V	Α	1.5
	380V	Α	0.95
	480V	Α	0.75
	500V	A	0.72
0 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	600V	Α	0.6
Operating current DC13	405)/	^	0.44
	125V	A	0.11
IFC Conventional free air thermal current lth	600V	A	0.22
IEC Conventional free air thermal current Ith Terminals		Α	10
reminais			oorow ond
	Auxiliary circuit type		screw and washer
	Auxiliary circuit screw		M3.5
	Auxiliary circuit width	mm	8
	Auxiliary circuit tool		Phillips 2
Conductor section			
	Auxiliary circuit Flexible w/o lug max	mm²	2.5
	Auxiliary circut Flexible c/w lug max	mm²	2.5
Tightening torque for terminals			
	Auxiliary circuit min	Nm	0.8
	Auxiliary circuit max	Nm	1
	Auxiliary circuit min	lbin	0.59
	Auxiliary circuit max	lbin	0.74
UL/CSA and IEC/EN 60947-5-1 designation			B600-R300
Ambient conditions			
Operating temperature			
	min	°C	-25
21	max	°C	60
Storage temperature	*.	°C	FO
	min	°C	-50 70
Componentian temperature	max	C	70
Compensation temperature		°C	20
	min may	°C	-20 60
Max altitude	max	m	3000
Mechanical features		111	3000
Operating position			
Characteristics	normal		Vertical plan
	allowable		±30°
	anewasie		Direct mounting
Fixing			on BF09
			BF38
Weight		g	160
UL technical data			
Full-load current (FLA) for three-phase AC motor			

Full-load current (FLA) for three-phase AC motor


ENERGY AND AUTOMATION

MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE **electric** (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 0.16...0.25A


> at 480V 0.25 Α 0.25 at 600V Α

Dimensions [mm (in)]


BF00 A... BF09 A... - BF12 A... - BF18 A... - BF25 A... three poles with RF...38 thermal overload relay

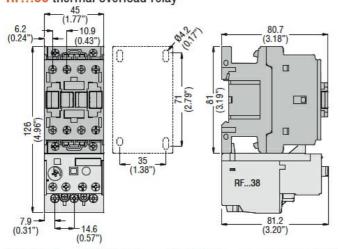

BF26 00A... - BF32 00A... - BF38 00A... three poles with RF...38 thermal overload relay

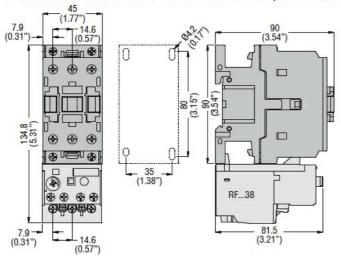

Wiring diagrams

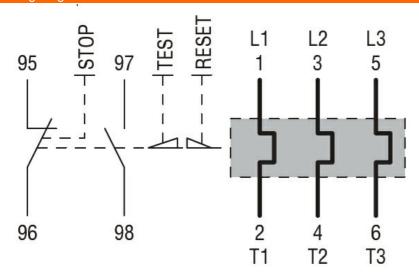

Certifications and compliance

Compliance





ENERGY AND AUTOMATION

MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE electric (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 0.16...0.25A

	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-4-1
	UL508
Certifications	
	CCC
	cULus
	EAC

ETIM classification

ETIM 8.0

EC000106 -Thermal overload relay