## RF380063



MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE **Electric** (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 AND AUTOMATION CONTACTORS, 0.40...0.63A



Product designation			RF38 Motor protection
Product type designation			relay
General characteristics			
Number of poles		Nr.	3
Overvoltage category			III
Pollution degree			3
Frontal IP degree			IP20
Type of release			Thermal
Protection fuse			
	gG (IEC)	А	2
	aM (IEC)	А	1
	RK5 (UL)	А	3
Phase failure detection			yes
Reset mode			Manual or
			automatic
Power circuit characteristics			
Rated insulation voltage Ui IEC/EN		V	690
Rated impulse withstand voltage Uimp		kV	6
Rated operational voltage		V	690
Operational frequency			
	min	Hz	0
	max	Hz	400
Operational current le			
	Operational current min	А	0.4
	Operational current max	А	0.63
Tripping class			10A
Test Button			yes
Trip indicator			yes
Terminals			
	type		screw and
	type		washer
	screw		M4
	width	mm	12.6
	tool		Phillips 2
Tightening torque for terminals			
	min	Nm	2
	max	Nm	2.5
	min	lbin	1.5
	max	lbin	1.8
Conductor section			
	Flexible w/o lug max	mm²	10
	Flexible c/w lug max	mm²	6
	AWG/kcmil max		8

## Auxiliary circuit characteristics



ENERGY AND AUTOMATION

**RF380063** MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE electric (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 0.40...0.63A

Auxiliary contacts

Auxiliary contacts			
	NO	Nr.	1
Auxiliant Dated inculation values of Li JEC/EN	NC	Nr. V	1
Auxiliary Rated insulation voltage Ui IEC/EN Auxiliary Rated impulse withstand voltage Uimp		kV	690 6
Auxiliary Rated operational voltage		V	690
Operating current AC15		v	090
Operating current AC13	24V	А	3
	120V	A	3
	240V	A	1.5
	380V	A	0.95
	480V	А	0.75
	500V	А	0.72
	600V	А	0.6
Operating current DC13			
	125V	А	0.11
	600V	А	0.22
IEC Conventional free air thermal current Ith		А	10
Terminals			
	Auxiliary circuit type		screw and washer
	Auxiliary circuit screw		M3.5
	Auxiliary circuit width	mm	8
	Auxiliary circuit tool		Phillips 2
Conductor section			
	Auxiliary circuit Flexible w/o lug max	mm²	2.5
	Auxiliary circut Flexible c/w lug max	mm²	2.5
Tightening torque for terminals			
	Auxiliary circuit min	Nm	0.8
	Auxiliary circuit max	Nm	1
	Auxiliary circuit min	lbin	0.59
	Auxiliary circuit max	lbin	0.74
UL/CSA and IEC/EN 60947-5-1 designation			B600-R300
Ambient conditions			
Operating temperature		°O	05
	min	°C ℃	-25
Storage temperature	max	U	60
Storage temperature		°C	50
	min max	°C ℃	-50 70
Compensation temperature	illax	U	10
	min	°C	-20
	max	°C	-20 60
Max altitude	IIIdA	 	3000
Mechanical features			
Operating position			
	normal		Vertical plan
	allowable		±30°
			Direct mounting
Fixing			on BF09 BF38
Weight		g	160
UL technical data		3	

RF380063







MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE electric (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 0.40...0.63A

Full-load current (FLA) for three-phase AC motor


	at 480V	Α	0.63	
	at 600V	Α	0.63	
Dimensions [mm (in)]				
BF00 A BF09 A BF12 A BF18 A BF25 A three poles with				



BF26 00A... - BF32 00A... - BF38 00A... three poles with RF...38 thermal overload relay



Wiring diagrams

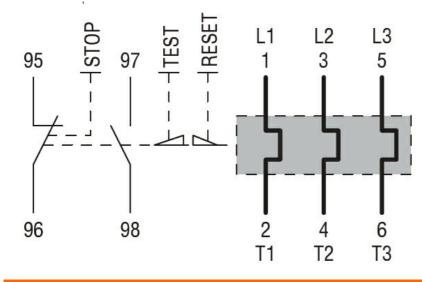

## Certifications and compliance

RF380063



ENERGY AND AUTOMATION

**RF380063** MOTOR PROTECTION RELAY, PHASE FAILURE/SINGLE-PHASE SENSITIVE. THREE-POLE electric (THREE-PHASE), MANUAL OR AUTOMATIC RESETTING. DIRECT MOUNTING ON BF09 - BF38 CONTACTORS, 0.40...0.63A

## Compliance

-	CSA C22.2 n° 14	
	IEC/EN 60947-1	
	IEC/EN 60947-4-1	
	UL508	
Certifications		
	CCC	
	cULus	
	EAC	
ETIM classification		
		EC000106 -

ETIM 8.0

EC000106 -Thermal overload relay