EasyLogic™ DM6xx0H series

DM6000H & DM6200H VAF PF digital panel meters in LED display

DM6220H VAF PF digital panel meters in LCD display

Introducing EasyLogic™ DM6xx0H meters that are ideal replacements for multiple analog meters for stand-alone metering in custom panels, switch boards, switch-gear, genset panels, motor control centres, power factor improvement panels, and OEM panel board.

DM6xx0H series meters offer large 8-segment alpha-numeric LED display type, intuitive navigation with self-guided 4 buttons, bright LED's of 14.2 mm height with 12 LEDs for indicating percentage of load in the circuit.

DM6220H meter displays measured parameters and values in elegant single row, bright back lit graphical LCD display in 128 * 32 pixels size.







Front view DM6220H with LCD display



Front view DM6000H with LED display



Rear view DM6000H non communication

Applications

Cost management

- Electrical installation remote monitoring
- Control panels
- Motor control centres
- Power distribution boards
- Original equipment manufacturers (OEM's)
- Building management system
- Panel instrumentation
- Energy management system

Network management

- Measurement of Power factor
- % unbalance for voltage and current
- Phase angle between the respective voltage and current phase
- Modbus RTU protocol, RS-485 communication port for integration with energy management systems (DM6200H & DM6220H)

Main characteristics

- Easy to install: Mounts using two retainer clips, no tools required.
 Compact meter with 49 mm meter depth behind the panel, connectable up to 480 V +10 % AC volts L-L without voltage transformers for installation complaint with measurement category III, and double insulated
- Easy to operate: Intuitive navigation with self-guided menus and Heartbeat LED indicates normal functioning of meters while it conveys the communication status when connected to RS-485 network
- LED display: Intuitive navigation with self-guided, four buttons, 8 segment alphanumeric LEDs of height ~14.2mm (0.55 in) and three lines of concurrent values with Kilo & Mega value indicators
- LCD display: Elegant single row, bright back lit graphical LCD display 128 * 32 pixels, Fast in-line view, three parameters name and value at one glance

Standard compliance:

- EMI/EMC tests as per IEC 61326-1
- CE certification as per IEC 61010-1 Edition 3
- cULus as per UL61010-1 and CAN/CSA-C22.2 IEC 61010-1 edition 3, for 480 V AC L-L
- Accuracy class 1.0 for V AF PF metering
- CT nominal: 5 A, I-nominal or 1 A, I-nominal (field settable)
- Password: Field configurable password for securing set up information
- Cyber security: Option for disabling RS-485 port through front panel keys against unauthorized access. This feature can also be used for maintenance and troubleshooting of complex communication network
- Analog load bar in LED display: the colour-coded analog load bar at the front side indicates the percentage of load through 12 LED's with the option to select full scale based on connected load
- Display: 4 digits for VAF PF parameters with auto scroll and auto range features
- Suppression current: To disregard the measurement of induced and panel auxiliary load current in the circuit (settable from 5 to 99 mA)
- Protection cover to ensure that terminal screws do not detach from the housing and are touch proof against fingers
- Smart line indicators in LCD display meter: helps check the presence of input supply voltage (healthy phase)
- Control power options: Universal range 44 to 300 V L-N AC/DC or low voltage DC control power of 9 to 36 V DC

DM6xx0H technical specifications

DM6xx0H technical specificati	ons		
General			
	er (PT or VT) / Current transformer (CT) ratio programmable at site		
Digital panel meters for measurement of basic electrica			
Instantaneous rms values			
Current	Average line current of 3-phase, per-phase, and calculated neutral current		
Voltage	Average voltage of L-L, L-N parameters, and per-phase		
Frequency	Any available line		
True power factor	Average and per-phase signed		
Unbalance	Maximum % unbalance among phases for Volts & Amps		
Revolution per minute (RPM)	RPM of alternator or generator when number of poles set for 2, 4, 6, 8, 12, 14 or 16 (any one pole)		
Life timer stored in non-volatile memory			
Time counters for measuring meter ON Hrs and I	power interruptions		
Display			
LED display: Bright red colour, 8 segment alphar	numeric LED, ~ 14.2 mm (0.55 in) height, 3 rows with 4 digits per row, auto range, auto scroll		
LCD display: Elegant single row, bright back lit go parameters name and value at one glance	raphical LCD display 132 (Horizontal) * 32 (Vertical) pixels, 60 Degree angular view. Fast in-line view, three		
Communication			
RS-485 serial (DM6200H)	Channel connection Industry standard Modbus RTU protocol		
Integration with software	Any Modbus compatible SCADA / DCS / PMS / EMS / BAS / BMS software		
Native Plug and Play support	Schneider Electric energy management system software - EcoStruxure™ Power Monitoring Expert,		
,	EcoStruxure™ Power Operation		
Diagnostics	ION Setup utility software for set-up/programming of meters		
Diagnostics Diagnostic page	Diagnostic page indicates the healthiness of communication system, device serial number, device		
Diagnosiic page	model number OS & RS version, communication status. All LED segment check in LED display. In LCD display meter - alternate pixels ON/ OFF test. LCD contrast level, set back-lit time out in the range of 1 to 99 sec.		
Lock / Un-Lock			
Page lock and unlock features	Once the commonly referred page is enabled for lock feature, the display returns to locked page in 4 minutes of inactive time		
Electrical characteristics			
Type of measurement	True RMS, 32 samples/cycle		
Type of measurement Measurement accuracy (Class 1.0 meters)	True RMS, 32 samples/cycle		
, ·	True RMS, 32 samples/cycle ± 0.5 % of reading		
Measurement accuracy (Class 1.0 meters)			
Measurement accuracy (Class 1.0 meters) Current, per-phase & average	± 0.5 % of reading		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average	± 0.5 % of reading ± 0.5 % of reading		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L)		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ 50/60 Hz ± 2		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency VA burden	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency VA burden Frequency — measurement	± 0.5 % of reading ± 0.05 % for reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ 50/60 Hz ± 2 ≤0.2 VA at 240 V L-N at 50 Hz		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency VA burden Frequency — measurement Nominal operating range	± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ 50/60 Hz ± 2 ≤0.2 VA at 240 V L-N at 50 Hz		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency VA burden Frequency — measurement	± 0.5 % of reading ± 0.05 % for reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ 50/60 Hz ± 2 ≤0.2 VA at 240 V L-N at 50 Hz		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency VA burden Frequency — measurement Nominal operating range Extended operating range	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ 50/60 Hz ± 2 ≤0.2 VA at 240 V L-N at 50 Hz		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency VA burden Frequency — measurement Nominal operating range Extended operating range Voltage input	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ 50/60 Hz ± 2 ≤0.2 VA at 240 V L-N at 50 Hz		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency VA burden Frequency — measurement Nominal operating range Extended operating range Extended operating range Voltage input Input-current CT connect CT primary	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ 50/60 Hz ± 2 ≤0.2 VA at 240 V L-N at 50 Hz 50/60 Hz ± 2 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz 80 to 480 V L-L ± 10 % Solo or multi-phase current measurement by installing CT (s) in either of A1, A2, A3, A12, A23, A13, A123 phase(s) 1 A to 32767 A, programmable		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency VA burden Frequency — measurement Nominal operating range Extended operating range Voltage input Input-current CT connect CT primary CT secondary	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ 50/60 Hz ± 2 ≤0.2 VA at 240 V L-N at 50 Hz 50/60 Hz ± 2 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz 80 to 480 V L-L ± 10 % Solo or multi-phase current measurement by installing CT (s) in either of A1, A2, A3, A12, A23, A13, A123 phase(s) 1 A to 32767 A, programmable 1 A or 5 A I-nominal (field settable)		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency VA burden Frequency — measurement Nominal operating range Extended operating range Voltage input Input-current CT connect CT primary CT secondary Operating current range with accuracy	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ 50/60 Hz ± 2 ≤0.2 VA at 240 V L-N at 50 Hz 50/60 Hz ± 2 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz 80 to 480 V L-L ± 10 % Solo or multi-phase current measurement by installing CT (s) in either of A1, A2, A3, A12, A23, A13, A123 phase(s) 1 A to 32767 A, programmable 1 A or 5 A I-nominal (field settable) 10 mA to 6 A+1		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency VA burden Frequency — measurement Nominal operating range Extended operating range Extended operating range Connect CT connect CT connect CT primary CT secondary Operating current range with accuracy Measured Amps with over range & Crest Factor	± 0.5 % of reading ± 0.05 % for reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ 50/60 Hz ± 2 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz 80 to 480 V L-L ± 10 % Solo or multi-phase current measurement by installing CT (s) in either of A1, A2, A3, A12, A23, A13, A123 phase(s) 1 A to 32767 A, programmable 1 A or 5 A I-nominal (field settable) 10 mA to 6 A ⁻¹ 5 mA to 10 A		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency VA burden Frequency — measurement Nominal operating range Extended operating range Voltage input Input-current CT connect CT primary CT secondary Operating current range with accuracy	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ 50/60 Hz ± 2 ≤0.2 VA at 240 V L-N at 50 Hz 50/60 Hz ± 2 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz 80 to 480 V L-L ± 10 % Solo or multi-phase current measurement by installing CT (s) in either of A1, A2, A3, A12, A23, A13, A123 phase(s) 1 A to 32767 A, programmable 1 A or 5 A I-nominal (field settable) 10 mA to 6 A+1		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency VA burden Frequency — measurement Nominal operating range Extended operating range Extended operating range To connect CT connect CT primary CT secondary Operating current range with accuracy Measured Amps with over range & Crest Factor Suppression current	± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ 50/60 Hz ± 2 ≤0.2 VA at 240 V L-N at 50 Hz 50/60 Hz ± 2 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz 80 to 480 V L-L ± 10 % Solo or multi-phase current measurement by installing CT (s) in either of A1, A2, A3, A12, A23, A13, A123 phase(s) 1 A to 32767 A, programmable 1 A or 5 A I-nominal (field settable) 10 mA to 6 A*¹ 5 mA to 10 A 5 to 99 mA (to disregard negligible load)		
Measurement accuracy (Class 1.0 meters) Current, per-phase & average Voltage, L-N, L-L, per-phase & average Power factor, per-phase & average Frequency Input-voltage VT (PT) connection VT (PT) primary U (V) nominal Operating voltage range with accuracy Measured Voltage with full range Permanent overload (withstand) Impedance Frequency VA burden Frequency — measurement Nominal operating range Extended operating range Extended operating range Connect CT primary CT secondary Operating current range with accuracy Measured Amps with over range & Crest Factor Suppression current Impedance	± 0.5 % of reading ± 0.5 % of reading ± 0.01 of reading ± 0.05 % for F-nominal 50/60 Hz ± 2 ± 0.2 % for Frequency range from 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz Selectable from No VT (direct), 1 VT, 2 VT to 3 VT 100 V L-L to 999 kV L-L max Up to 277 V L-N/ 480 V L-L (selectable VT secondary from 100, 110, 115, 120 to 415 V L-L) 80-480 V L-L ± 10 % Category III 35 to 600 V L-L 750 V L-L, continuous ≥5 MΩ 50/60 Hz ± 2 ≤0.2 VA at 240 V L-N at 50 Hz 50/60 Hz ± 2 30 to 48 Hz, 52 to 58 Hz and 62 to 70 Hz 80 to 480 V L-L ± 10 % Solo or multi-phase current measurement by installing CT (s) in either of A1, A2, A3, A12, A23, A13, A123 phase(s) 1 A to 32767 A, programmable 1 A or 5 A I-nominal (field settable) 10 mA to 6 A ⁻¹ 5 mA to 10 A 5 to 99 mA (to disregard negligible load) < 0.3 mΩ		

Version: 1.0 - 15/06/2021 PLSED310053EN

DM6xx0H technical specifications (continued)

AC control power	
Operating range	48 to 277 V L-N AC ± 10 %
Burden	≤4 VA at 240 V L-N 50 Hz
Frequency	50/60 Hz nominal (45 to 65 Hz operating range)
Ride-through time	200 milliseconds at 240 V L-N, 50 Hz
DC control power	
Operating range	48 to 277 V DC \pm 10 % or LVDC option of 9 to 36 V DC
Burden	≤2 W at 240 V DC
Ride-through time	120 milliseconds at 240 V
Displays update	
Instantaneous/ RMS parameters	1s
Power system	
Phase labelling	Configurable to 123, ABC, rst, pqr or ryb
Wiring configuration	13 wiring schemes (5 on front screen) 1ph, 2w, L-N 1ph, 2w, L-L 1ph, 3w, L-L with N (2-phase) 3ph, 3w, Delta, Ungrounded 3ph, 3w, Delta, Corner Grounded*2 3ph, 3w, Wye, Ungrounded*2 3ph, 3w, Wye, Ungrounded*2 3ph, 3w, Wye, Resistance Grounded*2 3ph, 3w, Wye, Resistance Grounded*2 3ph, 4w, Open Delta, Centre-Tapped*2 3ph, 4w, Wye, Ungrounded*2 3ph, 4w, Wye, Grounded 3ph, 4w, Wye, Resistance Grounded*3

 $^{^{+1}}$ Additional error of \pm 2 % between 10 mA to 50 mA, \pm 1 % between 50 mA to 100 mA $^{+2}$ Through communication

Feature set summary

Parameter	DM6000H Class 1.0 44 to 300 V AC/DC control power	DM6200H Class 1.0 44 to 300 V AC/DC control power	DM6220H Class 1.0 44 to 300 V AC/DC control power	DM6220H Class 1.0 9 to 36 V LVDC control power
V A F – per-phase & Average			•	
PF – per-phase & Average			•	
% Load, % V & I Unbalance, Ph-angle, RPM			•	
Modbus RS-485			•	
Sampling rate per cycle	32	32	32	32
Amps: per-phase & Average, calculated neutral current	•	•	•	•
Voltage: V L-N, V L-L, per-phase & Average			•	
Power factor: per-phase & Average			•	
Frequency: any available phase			•	
Revolutions per minute (RPM)			•	
Phase angle : Amp Deg (V to Amps, per-phase)			•	
% Unbalance: Maximum of 3-ph V and Amps	•		•	•
Life time counter - meter ON Hrs and number of power interruptions	•	•	•	•
Communication: RS-485, Modbus RTU protocol			•	
Display Type	LED	LED	LCD	LCD
Auxilliary Supply	44-300 V L-N AC or DC	44-300 V L-N AC or DC	44-300 V L-N AC or DC	9-36 V DC
Commercial reference number	METSEDM6000HCL10NC	METSEDM6200HCL10RS	METSEDM6220HCL1	METSEDM6220HCL1LVD

DM6xx0H series


Manharitaniahan			
Mechanical characteristics	200 (40 0)		
Weight	~ 300 gm (10.6 oz)		
IP degree of protection	IP 51 front side, IP 30 meter body, tested as per IEC 60529 (IP 54 with optional gasket METSEIP54GK96X96FF or upgrade to IP65 front side with Optional accessory kit METSEIP65OP96X96FF)		
Material	Polycarbonate meets UL 94V-0 flammability rating		
Dimensions W x H x D	$96 \times 96 \times 49$ mm (3.78 \times 3.78 \times 1.93 in) maximum depth of the meter from housing mounting flange and 13 mm (0.51 in) protrusion of meter from housing flange		
Mounting position	Vertical		
Panel thickness	5 mm (0.196 in) maximum		
Operating temperature	-10 to 60 °C (14 to 140 °F)		
Storage temperature	- 20 to 70 °C (-4 to 158 °F)		
Humidity rating	5 to 95 % RH non-condensing		
Pollution degree	2		
Altitude	≤2000 m (6562 ft) Category III		
Product life	>7 years		
Insulation category	Double insulation for user accessible parts		
Electromagnetic compatibility (tested a	s per IEC 61326-1)		
Electrostatic discharge	IEC 61000-4-2		
Immunity to radiated field	IEC 61000-4-3		
Immunity to fast transients	IEC 61000-4-4		
Immunity to impulse waves	IEC 61000-4-5		
Conducted immunity	IEC 61000-4-6		
Immunity to magnetic fields	IEC 61000-4-8		
Immunity to voltage dips	IEC 61000-4-11		
Emissions	Emissions FCC Part 15 Class A/CE		
Safety			
Europe	CE, as per IEC 61010-1 edition 3		
US and Canada	cULus as per UL61010-1 and CAN/CSA-C22.2 IEC 61010-1 edition 3, for 480 V AC L-L		
Measurement Category (Voltage inputs)	CAT III up to 480 V L-L		
Overvoltage Category (Control power)	CAT III up to 300 V L-N		
Dielectric	As per IEC/UL 61010-1 edition 3		
Protective Class	II, Double insulated for user accessible parts		
Green premium	EOL, REACH, PEP, RoHS complied		
Other certification	RCM & EAC for Russia		
RS-485 port	Modbus RTU: 2-Wires, with ground & shield, 4800, 9600, 19200 or 38400 baud, Parity - Even, Odd, None, 1 stop bit if parit Odd or Even, 2 stop bits if None DLF3000: Firmware update through communication port		
Isolation	2.5 kV RMS, double insulated		
Protection features	User configurable password (selectable from 0000 to 9999) protected for set-up		
Display language	English		
Technical publication	Printed installation guide (QSG) supplied with meter in multi-language (EN, ES, FR, DE, PT, RU, TR, ZH) and user guide in soft format		
Human machine interface	TOTAL		
Display type - LED	8 segment Alpha-numeric LED, ~ 14.2 mm (0.55 in) height, 3 rows with 4 digits per row, 1 column of 12 LEDs to indicate percentage of load connected in system. 4 digits for VAF PF parameters, 5+3 digits for energy parameters with auto scrolling and auto range		
Display type - LCD	Fast in-line view, three parameters name and value at one glance. 3+1 digits for instantaneous parameters and 9+3 digits for energy parameters with auto range		
Keypad	4 buttons for navigation at the front, combination of 2 buttons for lock/unlocking of commonly viewed page		
Communication activity	Green LED (for indicating RS-485 interface or heartbeat pulse)		

Version: 1.0 - 15/06/2021 PLSED310053EN


DM6xx0H VAF PF meter installation



DM6xx0H VAF PF meter mechanical dimensions

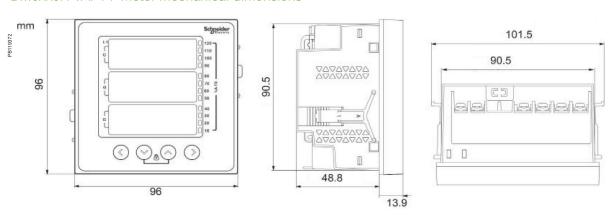

DM6xx0H series VAF PF meter display overview

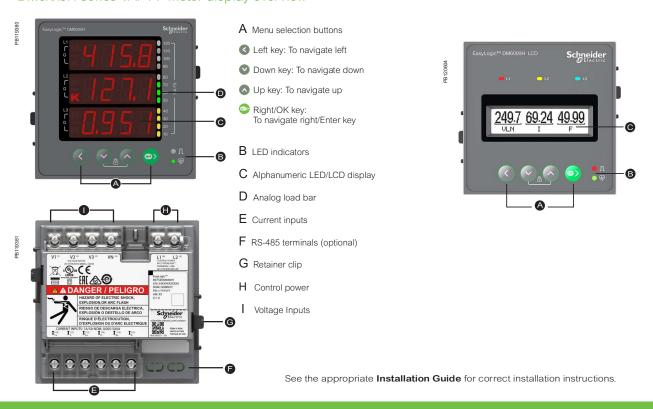

12