



# Essential Smartbright T5 Batten

## BN058C LED5/CW L600

Polycarbonate

BN058 Batten provide flexibility to customer to choose from 3 CCT and 4 different size and lumen packages, based on their specific need.

### Product data

General Information		Optical cover/lens finish	
Light source color	765 cool daylight	Optical cover/lens finish	Opal
Optical cover/lens type	Polycarbonate	Overall length	585 mm
Control interface	-	Overall width	21 mm
Protection class IEC	Safety class II	Overall height	32.3 mm
CE mark	-	Color	White
Number of products on MCB of 16 A type B	8	<b>Approval and Application</b>	
Light source engine type	LED	Ingress protection code	IP20 [ Finger-protected]
<b>Operating and Electrical</b>		Mech. impact protection code	IK02 [ 0.2 J standard]
Input Voltage	220 to 240 V	<b>Initial Performance (IEC Compliant)</b>	
Input Frequency	50 or 60 Hz	Initial luminous flux (system flux)	600 lm
Power Factor (Min)	0.5	Luminous flux tolerance	+/-10%
<b>Controls and Dimming</b>		Initial LED luminaire efficacy	85 lm/W
Dimmable	No	Init. Corr. Color Temperature	6500 K
<b>Mechanical and Housing</b>		Init. Color Rendering Index	>70
Housing Material	Polycarbonate	Initial input power	6.5 W
Optical cover/lens material	Polycarbonate	Power consumption tolerance	+/-10%

# Essential Smartbright T5 Batten

## Application Conditions

Ambient temperature range -20 to +40 °C


## Product Data

Full product code 911401709212  
Order product name BN058C LED5/CW L600  
EAN/UPC - Product 6923828624729  
Order code 911401709212

Numerator - Quantity Per Pack 1  
Numerator - Packs per outer box 24  
Material Nr. (12NC) 911401709212  
Net Weight (Piece) 0.080 kg



## Dimensional drawing

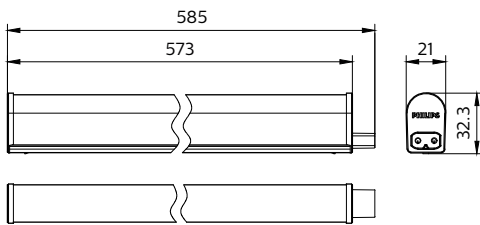

Batten LED

