



Essential Smartbright T5 Batten

BN058C LED3/CW L300

Polycarbonate

BN058 Batten provide flexibility to customer to choose from 3 CCT and 4 different size and lumen packages, based on their specific need.

Product data

General Information		Approval and Application	
Light source color	765 cool daylight	Optical cover/lens finish	Opal
Optical cover/lens type	Polycarbonate	Overall length	325 mm
Control interface	-	Overall width	21 mm
Protection class IEC	Safety class II	Overall height	32.3 mm
CE mark	-	Color	White
Number of products on MCB of 16 A type B	8	Initial Performance (IEC Compliant)	
Light source engine type	LED	Initial luminous flux (system flux)	300 lm
Operating and Electrical		Luminous flux tolerance	+/-10%
Input Voltage	220 to 240 V	Initial LED luminaire efficacy	85 lm/W
Input Frequency	50 or 60 Hz	Init. Corr. Color Temperature	6500 K
Power Factor (Min)	0.45	Init. Color Rendering Index	>70
Controls and Dimming		Initial input power	3.4 W
Dimmable	No	Power consumption tolerance	+/-10%
Mechanical and Housing			
Housing Material	Polycarbonate		
Optical cover/lens material	Polycarbonate		

Essential Smartbright T5 Batten

Application Conditions

Ambient temperature range -20 to +40 °C


Product Data

Full product code 911401709242
Order product name BN058C LED3/CW L300
EAN/UPC - Product 6923828624750
Order code 911401709242

Numerator - Quantity Per Pack 1
Numerator - Packs per outer box 24
Material Nr. (12NC) 911401709242
Net Weight (Piece) 0.050 kg



Dimensional drawing

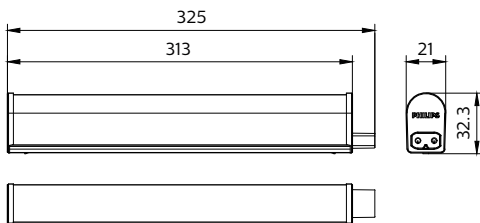

Batten LED

