



| | | | |
|--|-------------------|----------|----------|
| Product designation | INDUSTRIAL RELAYS | | |
| Product type designation | HR604C | | |
| Contact characteristics | | | |
| Contact configuration | 4 C/O | | |
| Rated insulation voltage U_i IEC/EN | V | 500 | |
| Rated impulse withstand voltage U_{imp} | kV | 4 | |
| IEC Conventional free air thermal current I_{th} | A | 5 | |
| Rated current (I_n) | A | 5 | |
| Relay control voltage | V | 24VDC | |
| Max contrrollable power in | AC-1 | W | 5 |
| Rated operating power AC-1 | | VA | 1250 |
| Rated operating power AC-15 | 230 VAC | VA | 150 |
| Single-phase motor control | 230VAC | kW | 0.37 |
| Rated operating current DC-1 | 30V | A | 8 |
| | 110V | A | 0.3 |
| | 220V | A | 0.1 |
| Minimum switching load | V / mA | 5 / 100 | |
| Contact impedance | m Ω | 100 | |
| Contact material | Ag/Ni | | |
| Operating times | | | |
| Closing | ms | <25 | |
| Opening | ms | <25 | |
| Operations | | | |
| Mechanical life | cycles | 20000000 | |
| Electrical life AC1 | cycles | 100000 | |
| Coil characteristics | | | |
| Average coil consumption AC at 20°C | VA | 1.7 | |
| Average coil consumption DC at 20°C | W | 1.1 | |
| Operating range | Closing | % U_n | 75...110 |
| | Opening | % U_n | 10...30 |
| Maximum cycle frequency | cycles/h | 3600 | |
| Mechanical features | | | |
| Max socket terminal tightening torque | Nm | 0.6 | |
| Socket screw tightening tool (cross / flat blade) | PH1 / 4.5mm | | |
| Conductor section | AWG/Kcmil | min | 20 |
| | | max | 14 |

IEC

| | | |
|-----|-----------------|-----|
| min | mm ² | 0.5 |
| max | mm ² | 2.5 |

Operating position

| | |
|--------|-----|
| normal | Any |
|--------|-----|

Fixing

On 35mm DIN rail and with screw

Ambient conditions

Temperature

Operating temperature

| | | |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +70 |

Storage temperature

| | | |
|-----|----|-----|
| min | °C | -40 |
| max | °C | +80 |

Other features

Indication

Yes

Mechanical contact position indicator


Yes

Mechanical test actuator


Yes

Dimensions [mm (in)]


HR60 2C... with socket HR6XS21 - HR6XS22

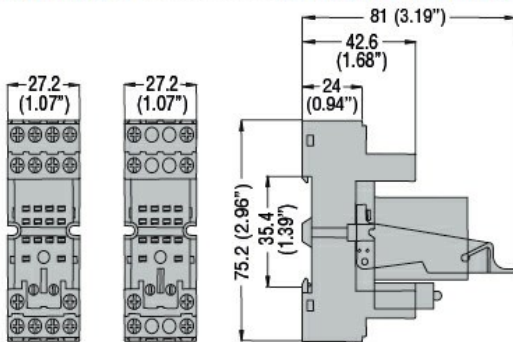



HR60 4C... with socket HR6XS41 - HR6XS42

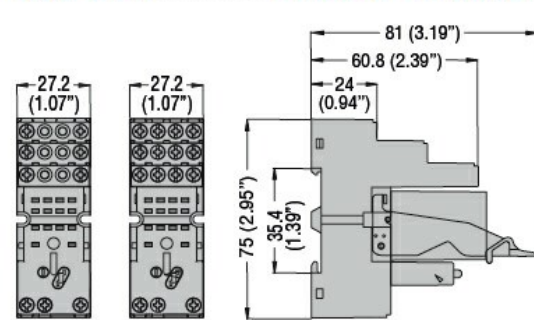

HR60 2C... - HR60 4C... with socket HR6XS21S - HR6XS41S

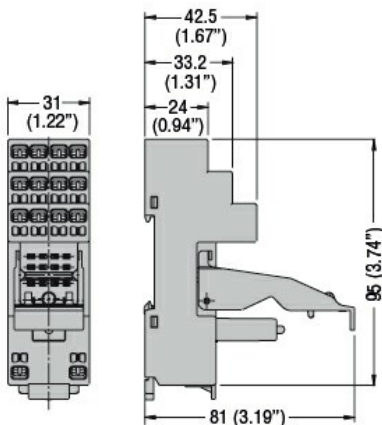

Wiring diagrams

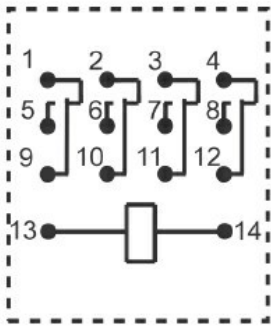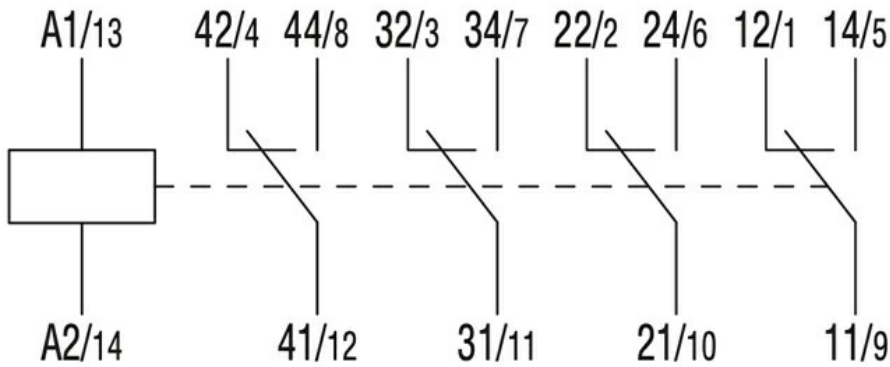

Certifications and compliance

Compliance

IEC/EN 61810

Certificates

CSA

cURus

EAC

VDE

ETIM classification

ETIM 8.0

EC001437 -
Switching relay