



Start-up priority change relay.
Modular version
LVMP05
Start-up priority change relay

Product designation

Product type designation

Function

Auxiliary supply

Supply voltage Type		Multi voltage
Rated voltage Us		24/48VDC or 24...240VAC
Operating voltage range		0.85...1.1 Us
Rated frequency	Hz	50/60
Power consumption Max	VA	1.6
Power dissipation Max	W	0.9

Relay outputs

Number of relays	Nr.	2
Relay state		Normally de-energised, energises at tripping
Contact arrangement		2 x 1NO-SPST contact
Rated operational voltage AC (IEC)	VAC	250
IEC Conventional free air thermal current Ith	A	8
UL/CSA and IEC/EN 60947-5-1 designation		B300
Electrical life (with rated load)	cycles	10 ⁵
Mechanical life	cycles	30x10 ⁶


Indications

Indication		1 green LED for power on 1 red LED for relay state
------------	--	--


Functions

3 detecting electrodes (MIN, MAX and COM)	No
5 detecting electrodes (MIN1, MAX1, MIN2, MAX2 and COM)	No
Sensitivity adjustment 2.5...50k Ω	No
Sensitivity adjustment 2.5...100k Ω	No
Sensitivity adjustment 2.5...200k Ω	No
Adjustable sensitivity full-scale value 25-50-100-200 k Ω	No
Separate sensitivity adjustment for MAX probe (foam detection)	No
Emptying function	No
Filling function	No
Emptying function with MIN and/or MAX alarm	No
Filling function with MIN and/or MAX alarm	No
Emptying function with pump priority change	No
Filling function with pump priority change	No

Tank filling, well drawing and alarm	No						
Filling-emptying adjustment selector	No						
Programming selector for 5 different	No						
Motor start-up priority change	Yes						
Connections							
Terminals type	Screw						
Tightening torque for terminals	<table border="0"> <tr> <td>max</td> <td>Nm</td> <td>0.8</td> </tr> <tr> <td>max</td> <td>lbin</td> <td>7</td> </tr> </table>	max	Nm	0.8	max	lbin	7
max	Nm	0.8					
max	lbin	7					
Conductor cross section							
AWG/Kcmil	<table border="0"> <tr> <td>min</td> <td>AWG</td> <td>24</td> </tr> <tr> <td>Max</td> <td>AWG</td> <td>12</td> </tr> </table>	min	AWG	24	Max	AWG	12
min	AWG	24					
Max	AWG	12					
IEC	<table border="0"> <tr> <td>min</td> <td>mm²</td> <td>0.2</td> </tr> <tr> <td>Max</td> <td>mm²</td> <td>4</td> </tr> </table>	min	mm ²	0.2	Max	mm ²	4
min	mm ²	0.2					
Max	mm ²	4					
Insulations							
Rated insulation voltage Ui	V 250						
Rated impulse withstand voltage Uimp	kV 4						
Operating frequency withstand voltage	kV 2						
Ambient conditions							
Temperature							
Operating temperature	<table border="0"> <tr> <td>min</td> <td>°C</td> <td>-20</td> </tr> <tr> <td>max</td> <td>°C</td> <td>+60</td> </tr> </table>	min	°C	-20	max	°C	+60
min	°C	-20					
max	°C	+60					
Storage temperature	<table border="0"> <tr> <td>min</td> <td>°C</td> <td>-30</td> </tr> <tr> <td>max</td> <td>°C</td> <td>+80</td> </tr> </table>	min	°C	-30	max	°C	+80
min	°C	-30					
max	°C	+80					
Housing							
Execution	Modular DIN rail mounting						
N° of modules	1						
Material	Self-extinguishing polyamide						
Mounting	35mm DIN rail (IEC/EN 60715) or by screws using extractable clips						
IEC degree of protection	IP40 on front / IP20 on terminals						
Dimensions (W x H x D)	mm 17.5 x 104.7 x 64.9						
Weight	g 90						
Dimensions [mm (in)]							

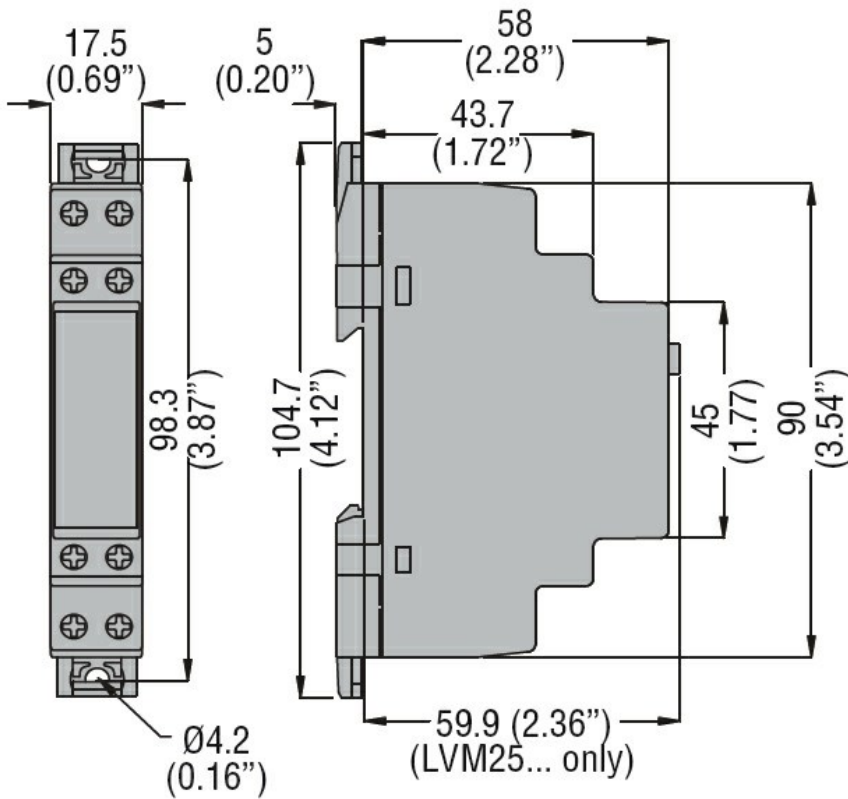

Wiring diagrams

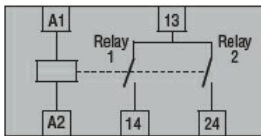

Certifications and compliance

Compliance

CSA C22.2 n° 14
IEC/EN 60255-5
IEC/EN 61000-6-2
IEC/EN 61000-6-3
UL508

Certificates

cULus
EAC

ETIM classification

ETIM 8.0

EC001447 - (Fill)
level monitoring
relay