

Technical data sheet

Base, MultiBase + NPE with remote signalling


Item no. 5096651



- Suitable for V 25-B+C, V 20-C and V10-C
- Pre-mounted and ready for connection
- Multifunction terminals for easy connection to series-mounted devices
- Upper parts can be rotated through 180 degrees
- With remote signalling, potential-free NO contact, for function monitoring
- 3+1 protection circuit for TN-S and TT network systems



Dimensions

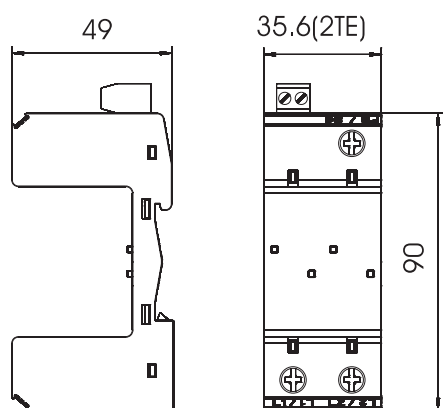

Master data

Item no.	5096651
Type	MB 1+NPE+FS
Description 1	MultiBase
Description 2	1-pole + NPE w. signal contact
Dimension	1+NPE+FS
Smallest sales unit (VG)	1,00 Piece
Weight	11,60 kg/100 pc.

Technical data sheet

Base, MultiBase + NPE with remote signalling

Item no. 5096651



Technical data

Temperature range	-40+80 °C
Pole version	1+N/PE
Version	1 + NPE
Mounting type	Hat rail 35 mm
Installation type	DIN rail 35 mm
Protection rating	IP20
Protection rating	IP 20
Division unit TE (17.5 mm)	2
Remote signalling	<input checked="" type="checkbox"/>
Telecommunications contact	<input checked="" type="checkbox"/>
Connection cross-section, flexible	2,50 - 25,00 mm ²
Connection cross-section, rigid	2,50 - 35,00 mm ²
Connection cross-section, multi-wire	2,50 - 35,00 mm ²