

# PSS100/12/8. 4



**connectwell**  
THE RIGHT CONNECTION

## 8.4A, 100W Single Phase Din Rail Mountable Switching Power Supplies

- Full Range Input selection from 90 to 264VAC Auto select
- Typical efficiency of 84%
- Compact design with a width of only 54mm
- Two years product warranty

### GENERAL SPECIFICATION

Switching Frequency (typ.)	55 KHz
Min. Isolation Voltage -AC (Input-FG)	1500 VAC
Min. Isolation Voltage -AC (Input-Output)	3000 VAC
Min. Isolation Voltage -DC (Input-FG)	2121 VDC
Min. Isolation Voltage -DC (Input-Output)	4242 VDC
Isolation Resistance (Input-Output @500VDC)	100 MΩ
Ambient Temperature Range (Operational at Vi norm)	-35 to +71 deg.C
Derating from +61°C to +71°C (see derating curve)	2.5%/ °C
Ambient Temperature Range (Storage)	-40 to +85 deg.C
Relative Humidity Range	20 to 95 %RH
Temperature Coefficient Range	+/- 0.03 % per deg. C
MTBF (Bellcore Issue 6 @40°C, GB)	448000 hr
Altitude During Operation (IEC 60068-2-13)	4850 m
Dimension	L90 X W54 X D114 mm
Cooling	Free Air Convection
Pollution Degree	2

### ORDERING INFORMATION

Cat. No.	PSS100/12/8.4
Output Voltage	12 VDC
Output Current	8.4 A
Output Wattage	100 W
Efficiency (min.)	82%
Efficiency (typ.)	84%
Input Voltage Range	90-264 VAC
Standard Packing Qty	1

### PHYSICAL SPECIFICATIONS

Dimensions (H x W x D)	90 X 54 X 114 mm
Weight	430 g
Case Material	Plastic
Packing	0.51kg ; 32 pcs / 17.5 kg / 1.85 CUFT

### APPROVALS



### ACCESSORIES

IMAGES	CAT. NO.	DESCRIPTION	STD. PACK
	CA501-1M	Din 32 Rail unslotted 1 meter	50
	CA501-1M-S	Din 32 Rail slotted 1 meter	50
	CA501-2M	Din 32 Rail unslotted 2 meter	50
	CA501-2M-S	Din 32 Rail slotted 2 meter	50
	CA701-1M	Din 35 Rail unslotted 1 meter	50
	CA701-2M	Din 35 Rail unslotted 2 meter	50
	CA701-2M-S	Din 35 Rail slotted 2 meter	50
	CA701-1M-S	Din 35 Rail slotted 1 meter	50
	CA701-15-1M	Din 35 Rail 15 deep unslotted 1 meter	50
	CA701-15-1M-S	Din 35 Rail 15 deep slotted 1 meter	50
	CA701-15-2M	Din 35 Rail 15 deep unslotted 2 meter	50
	CA701-15-2M-S	Din 35 Rail 15 deep slotted 2 meter	50
	CA202	End Clamp in Polyamide suitable for Din 35 / Din 35-15 Rails	25
	CA702	End Clamp in Polyamide 66 suitable for Din 32 / Din 35 / Din 35-15 Rails	50
	SCPH1	Phillips Screwdriver for Phillips Recess screws	10

### STANDARD USED FOR TESTING

UL/cUL	UL 508 Listed UL 60950-1, UL 1310 Class 2 Power (only 24V/E w/o Class 2) Recognized
TUV	EN 60950-1, CB scheme , EN 61558-1, EN 61558-2-17 (meet EN 60204)
CE	EN 61000-6-3, EN 55022 Class B, EN 61000-3-2, EN 61000-3-3 E N 61000-6-2, EN 55024, EN 61000-4-2 Level 4, EN 61000-4-3 Level 3 EN 61000-4-4 Level 4, EN 61000-4-5 L-N Level 3, L / N-FG Level 4 EN 61000-4-6 Level 3, EN 61000-4-8
Shock resistance	meet IEC 60068-2-6 (Mounting by rail : 10-500 Hz, 2G, along X, Y, Z each Axis, 60 min for each Axis)
Vibration resistance:	meet IEC 60068-2-27 (15G, 11ms, 3 Axis, 6 Faces, 3 times for each Face)

### INPUT SPECIFICATIONS

Input Phase	Single
AC Input Voltage Range	90 to 264
DC Input Voltage Range	120 to 375

# PSS100/12/8. 4



### INPUT SPECIFICATIONS

Rated Max. Input Voltage	240 VAC
Rated Min. Input Voltage	100 VAC
Line Frequency-Max.	63 Hz
Line Frequency-Min.	47 Hz
Max. Inrush Current (Vi: 115 VAC)	30 A
Max. Inrush Current (Vi: 230 VAC)	60 A
Rated Input Current -Typ. (Vi : 90 VAC)	2.4 A
Rated Input Current -Typ. (Vi : 115 VAC)	1.65 A
Rated Input Current -Typ. (Vi : 230 VAC)	0.83 A
Power Dissipation (Vi: 230 VAC, Io norm)	18.5 W
Leakage Current (Input-Output)	0.25 mA

### OUTPUT SPECIFICATIONS

Output Voltage	12 VDC
Output Current	8.4 A
Output Voltage Accuracy (Adjusted before shipment)	0 to +1 %
Minimum Load	0 %
Line Regulation	+/- 1 %
Load Regulation: Single Mode	+/- 1 %
Load Regulation: Parallel Mode	+/- 5 %
Output Voltage Trim Range	11.4 to 14.5 VDC
Rated Continuous Loading	8.4A @12Vdc / 6.9A @14.5Vdc
Hold Up Time ( Vi: 115VAC)	15 msec
Hold Up Time ( Vi: 230VAC)	30 msec
Turn On Time	1000 ms
Turn On Time With 7000 µF	1500 msec
Rise Time	150 ms
Rise Time With 7000 µF	500 ms
Fall Time	150 msec
Transient Recovery Time	2 ms
Ripple and Noise (BW = 20MHz)	50 mV
Power Back Immunity	18 VDC
Capacitor Load	7000 µF
DC ON Indicator Threshold at start up (Green LED)	10.0 to 11.2 VDC
DC LOW Indicator Threshold after start up (Red LED)	10.0 to 11.2 VDC
Parallel Operation	3 unit
Efficiency	84%

### CONTROL AND PROTECTION SPECIFICATIONS

Input fuse	T3.15A / 250VAC internal
Internal surge voltage protection: IEC61000-4-5	Varistor
Rated over load protection	110 to 140 %
Over voltage protection	14.5 to 17.4 VDC

### CONTROL AND PROTECTION SPECIFICATIONS

Output short circuit	Fold Forward
Degree of protection	IP20

### PIN CONFIGURATION

PIN NO	POSITION	DESIGNATION	DESCRIPTION
1	OUT	RDY	A normal open relaycontact for DC ON level control
2	OUT		(never connect except 24V/E model)
3,4	OUT	V+	Positive output terminal
5,6	OUT	V-	Negative output terminal
7	IN	Ground	Ground this terminal to minimize high frequency emissions
8	IN	N	Input terminals (neutral conductor, no polarity at DC input)
9	IN	L	Input terminals (phase conductor, no polarity at DC input)
	OTHER	DC ON	Operation indicator LED
	OTHER	DC LO	DC LOW voltage indicator LED
	OTHER	Vout ADJ.	Trimmer-potentiometer for Vout adjustment
	OTHER	S/P	Single / Parallel select switch


### CONNECTION DETAILS

Screw terminal: 2 AWG24-10 (0.2-4mm<sup>2</sup>) flexible / solid cable, - Input connector can withstand torque at maximum 9 pound-inches. - Output connector can withstand torque at maximum 5.5 pound-inches.

### INSTALLATION DETAILS

Cooling Normal convection. All sides 25mm free space. For cooling recommended connector size range screw terminal : AWG24-10 (0.2-4 sq.mm) flexible/solid cable-Input connector can withstand torque at max.9 pound-inches -Output connector can withstand torque at max.5.5 pound inches

### CIRCUIT SCHEMATIC

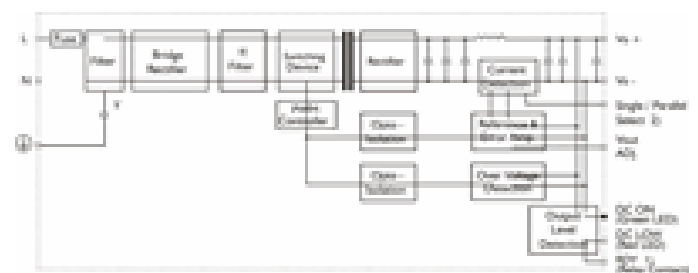

Notes: 1) For 24V Model Only  
2) 24V Model without this function


PSS100/12/8.  
4



**connectwell**  
THE RIGHT CONNECTION


CURRENT LIMITED CURVE

PSS100-24A

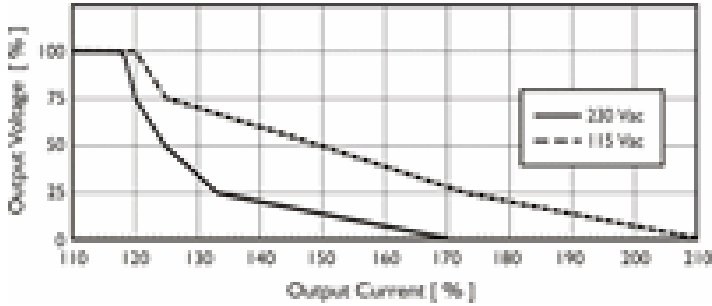


EFFICIENCY CURVE

PSS100-24A

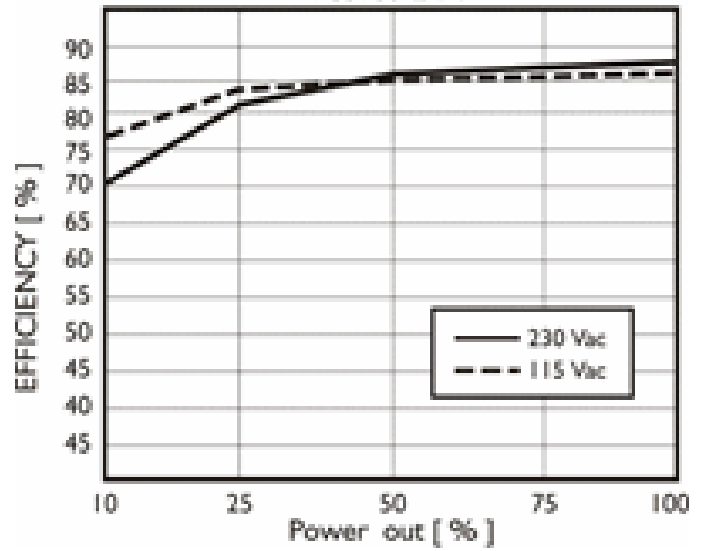

DERATING CURVE

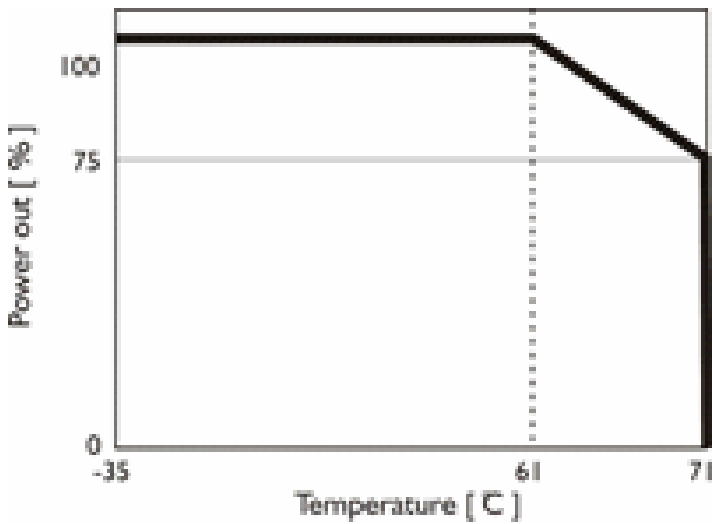

DIMENSIONAL DIAGRAM

