


Metric-Size One-Touch Fittings Series SQ



- Accepts many types of plastic tubing (polyurethane, nylon, soft nylon, polyethylene)
- Can be used for low vacuum(10 torr) KFII
- Positive sealing and reduced resistance (when tubing is inserted)
- Low disconnection force (when releasing tubing)

How to Order

SQ L 06 - 01 S - X2 S


1 2 3 4 5

- | | |
|---|--|
| <p>1 Model</p> <p>2 Applicable tube O. D.
04 : Ø4
06 : Ø6
08 : Ø8
10 : Ø10
12 : Ø12</p> <p>3 Port size
M5 : M5 x 0,8</p> | <p>01 : R(c) 1/8
02 : R(c) 1/4
03 : R(c) 3/8
04 : R(c) 1/2</p> <p>4 Sealant screw
S : Sealant</p> <p>5 Nickel coated
Blank : Standard type
X2 : Copper-free(Nickel coated)</p> |
|---|--|

Standard Specifications

Fluid type	Air
Max. operating pressure	0~150psi (0~9.9kgf/cm ²)
Ambient and fluid temperature	0~60 °C
Applicable tube O.D	Ø4, Ø6, Ø8, Ø10, Ø12

Structural Diagram



SQH



SQL



SQT



SQY



SQU



SQW



SQV



SQF



SQE



SQLF



SQH-R



SQJ




SQZ-00



Applicable tube material

Applicable tube O.D (mm)

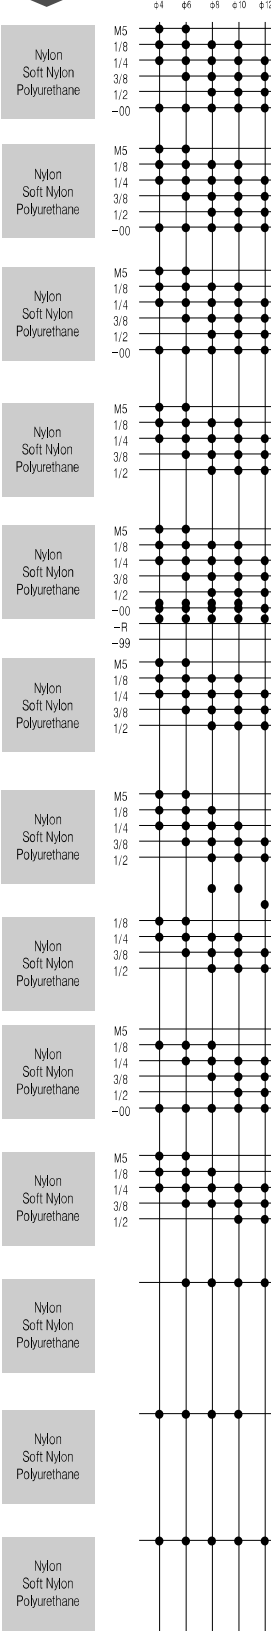

Auto Switches
W1H
W13
WB1
W2P
W3
W4
W5
W6
W7/W8
W9/W10
SQ
SC
SP
SP4000
SPM
SP2000
SN
SHF
SHS
DCH
SF
USF
ST
Motion