

PFXSP5660TPD

- Standard product information
- Electrical specifications
- Interface specifications
- Structural specifications
- Display specifications
- Environmental specifications
- Wireless LAN specifications
- Dimensions

Standard product information

Family	HMI
Series	SP5000 Series
Size	12"
Model	PFXSP5660TPD
Global Code	PFXSP5660TPD
Product Features	12" DC Wireless LAN Auto Scaling Brightness Sensor (Premium Display)
Repair Status	✓ (Maintenance service is available, able to be maintained.)

Display specifications

Display type	TFT Color LCD
Display size	12.1"
Resolution	1,024 x 768 pixels (XGA)
Auto scaling	Equipped
Effective display area	W245.76 x H184.32 mm [W9.68 x H7.26 in.]
Display colors	16 million colors
Backlight	White LED (Not user replaceable. When replacement is required, contact your local distributor.)
Backlight service life	50,000 hrs. or more (each in continuous operation at 25 °C [77 °F] before backlight brightness decreases to 50%)
Brightness control	0 to 100 (Adjusted with touch panel or software)
Brightness sensor	Equipped
Touch panel type	Resistive Film (analog, multi-touch)
Touch panel resolution	1,024 x 1,024









Touch panel lifetime	1,000,000 times or more
-----------------------------	-------------------------

Electrical specifications

Rated input voltage	12 to 24 Vdc
Input voltage limits	10.8 to 28.8 Vdc
Allowable voltage drop	12 Vdc: 1.25 ms or less 24 Vdc: 5 ms or less
Power consumption	Max. 23 W When power is not supplied to external devices: 20 W or less Backlight adjusted (20%): 13 W or less Backlight OFF (Stand-by mode): 8 W or less ^{*1}
In-rush current	30 A or less
Noise immunity	Noise Voltage : 1,000 Vp-p Pulse Duration : 1 μs Rise Time : 1 ns (via noise simulator)
Voltage endurance	1,000 Vac, 20 mA for 1 minute (between power terminal and FG terminals)
Insulation resistance	500 Vdc, 10 MΩ or more (between power terminal and FG terminals)

*1 Power consumption for Display Module only

Environmental specifications

International safety standards	       
Surrounding air temperature	0 to 60 °C [32 to 140 °F]
Storage temperature	-20 to +60 °C [-4 to 140 °F]
Ambient humidity	10 to 90 % RH (Wet bulb temperature: 39 °C [102.2 °F] max. - no condensation)
Storage humidity	10 to 90 % RH (Wet bulb temperature: 39 °C [102.2 °F] max. - no condensation)
Dust	0.1 mg/m ³ (10 ⁻⁷ oz/ft ³) or less (non-conductive levels)
Pollution degree	For use in Pollution Degree 2 environment
Corrosive gases	Free of corrosive gases
Air pressure (altitude range)	800 to 1,114 hPa (2,000 m [6,561 ft.] above sea level or less)
Vibration resistance	IEC/EN 61131-2 compliant 5 to 9 Hz single amplitude 3.5 mm [0.14 in.] 9 to 150 Hz fixed acceleration: 9.8 m/s ² X, Y, Z directions for 10 cycles (approx. 100 min.)

Concussion resistance	IEC/EN 61131-2 compliant 147 m/s ² , X, Y, Z directions for 3 times
Electrostatic discharge immunity	Contact Discharge Method: 6 kV Air Discharge Method: 8 kV (IEC/EN61000-4-2 Level 3)

Interface specifications

USB (Type A)	Conforms to USB 2.0 (Type A) x 1 Power supply voltage: 5 Vdc ±5 % Output Current: 500 mA Communication distance: 5 m [16.4 ft.]* ²
USB (mini-B)	Conforms to USB 2.0 (mini-B) x 1, Communication Distance: 5 m [16.4 ft]

*² When using the Display Module with the Power Box, you can connect only one of each type of USB device, such as one USB flash drive, one transfer cable, or one barcode reader. If you connect multiple devices that are the same type, only the first device will work.

▼ Wireless LAN specifications

Standards	IEEE802.11b/IEEE802.11g/IEEE802.11n* ³
Frequency bandwidth	2.4 GHz
Channel bandwidth	20 MHz
Channel	Access Point mode: 1 to 11 ch Client mode: North America US: 1 to 11 ch Japan JP: 1 to 13 ch Europe EU: 1 to 13 ch Korea KR: 1 to 13 ch China CN: 1 to 13 ch Taiwan TW: 1 to 11 ch* ⁴
Transmission speed	IEEE802.11b: max 11 Mbps IEEE802.11g: max 54 Mbps IEEE802.11n: max 72.2 Mbps
Transmission distance	The maximum 30 meters. (Distant varies depending on application software or use environment.)
Action mode	Client mode / Access Point mode
Communication mode	Infrastructure
Network authentication	Open, WPA-Personal, WPA2-Personal
Data encryption	WEP (128 bit) (Open) AUTO/TKIP (WPA-Personal) AES (WPA2-Personal)* ⁵
Maximum client connections	10
Connection angle and distance	Only the display side is connectable. The enabled connectivity angle and distance depend on your operating environment, applications to be used, and a communication target device. Be sure to conduct operation check including directionality in your operating environment before use.

*³ For the Wireless LAN, please use in a combination with the Open Box module. Do not use wireless communication to control machinery. Wireless communication system design must take into account the possibility of communication interference.

*⁴ In Access Point mode, IEEE802.11d is not supported.
In Client mode, if the surrounding access points do not support IEEE802.11d, channels are limited from 1 to 11 ch.

*⁵ In Access Point mode, WEP is not supported.

Structural specifications

Grounding	Functional grounding: Grounding resistance of 100 Ω, 2 mm ² (AWG 14) or thicker wire, or your country's applicable standard (same for FG and SG terminals).
Cooling method	Natural air circulation
Structure	When using a factory-installed front USB cover: IP65F, IP67F, Type 1 When using a front USB cover as an option: IP66F, IP67F, Type 1, Type 4X (indoor use only)/13 NOTE: The option is a front USB cover with screw manufactured by Pro-face (Model Number PFXZCDCVUS1). ^{*6}
External dimensions	W315 x H241 x D67 mm [W12.4 x H9.49 x D2.64 in.]
Panel cut-out dimensions	W301.5 x H227.5 mm [W11.87 x H8.96 in.] Panel thickness area: 1.6 to 5 mm [0.06 to 0.2 in.] ^{*7}
Weight	3.2 kg [7.1 lb] or less ^{*8}


^{*6} The front face of the unit, installed in a solid panel, has been tested using conditions equivalent to the standards shown in the specification. Even though the unit's level of resistance is equivalent to these standards, oils that should have no effect on the unit can possibly harm the unit. This can occur in areas where either vaporized oils are present, or where low viscosity cutting oils are allowed to adhere to the unit for long periods of time. If the unit's front face protection sheet becomes peeled off, these conditions can lead to the ingress of oil into the unit and separate protection measures are suggested. Also, if non-approved oils are present, it may cause deformation or corrosion of the front panel's plastic cover. Therefore, prior to installing the unit, be sure to confirm the type of conditions that will be present in the unit's operating environment. If the installation gasket is used for a long period of time, or if the unit and its gasket are removed from the panel, the original level of the protection cannot be guaranteed. To maintain the original protection level, be sure to replace the installation gasket regularly.

^{*7} For dimensional tolerance, everything +1/-0 mm [+0.04/-0 in.] and R in angle are below R3 [R0.12 in.]. Even if the installation wall thickness is within the recommended range for the "Panel Cut Dimensions", depending on wall's material, size, and installation location of GP unit and other devices, the installation wall could warp. To prevent warping, the installation surface may need to be strengthened.


^{*8} Display module only.

Dimensions

External dimensions Display module and box module combination

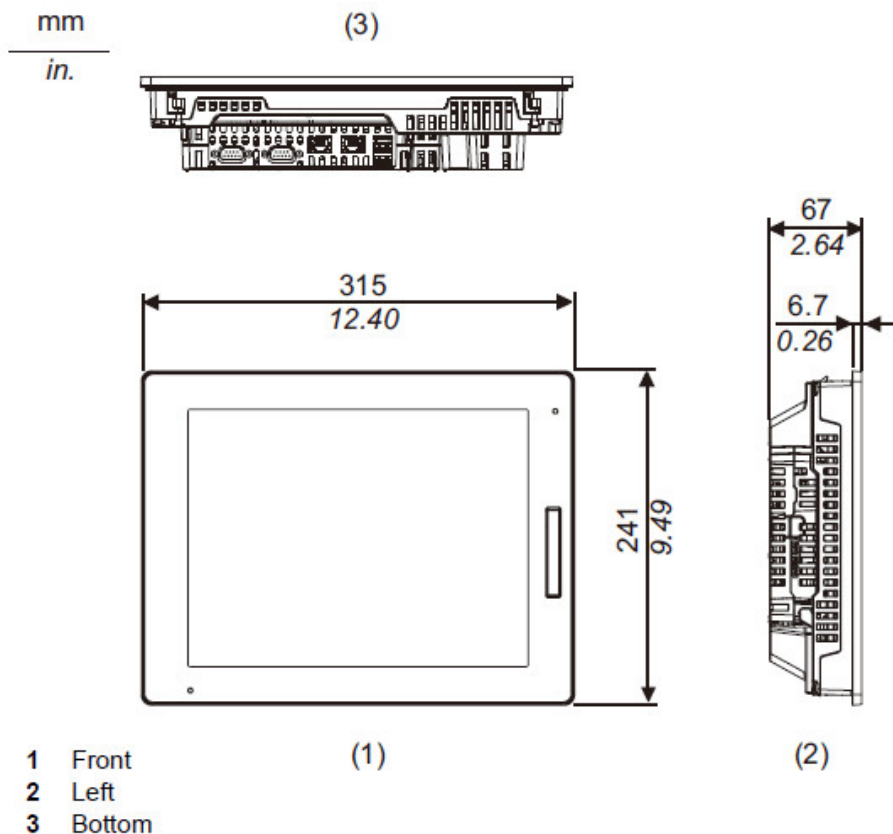


Panel cut-out dimensions

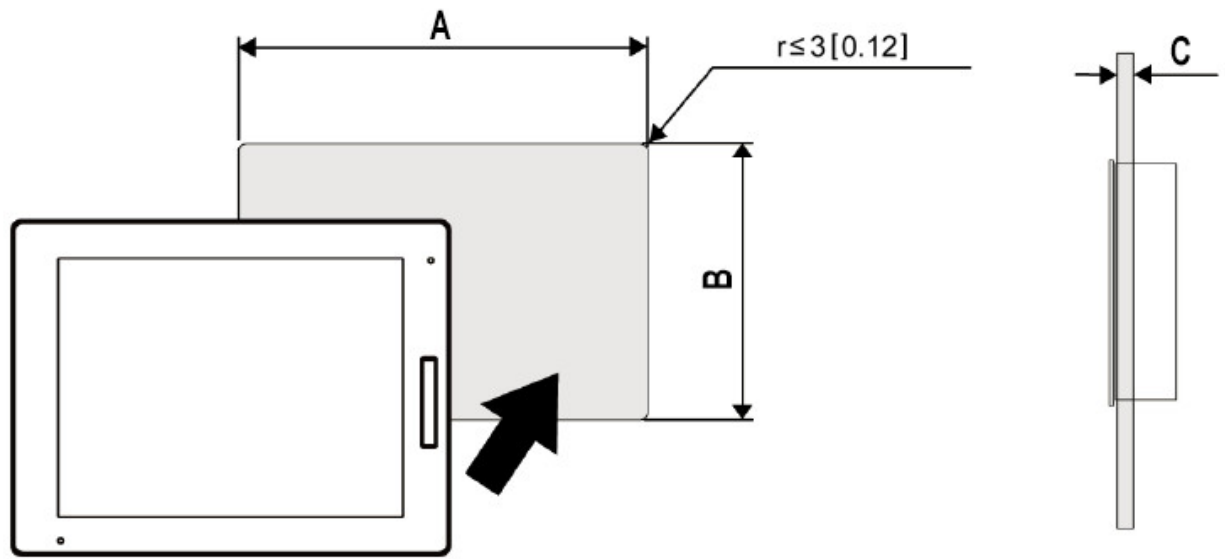

A	B	C
301.5 (+1/-0) mm [11.87 (+0.04/-0)] in.	227.5 (+1/-0) mm [8.96 (+0.04/-0)] in.	1.6 to 5 mm [0.06 to 0.2] in.

External dimensions with cable

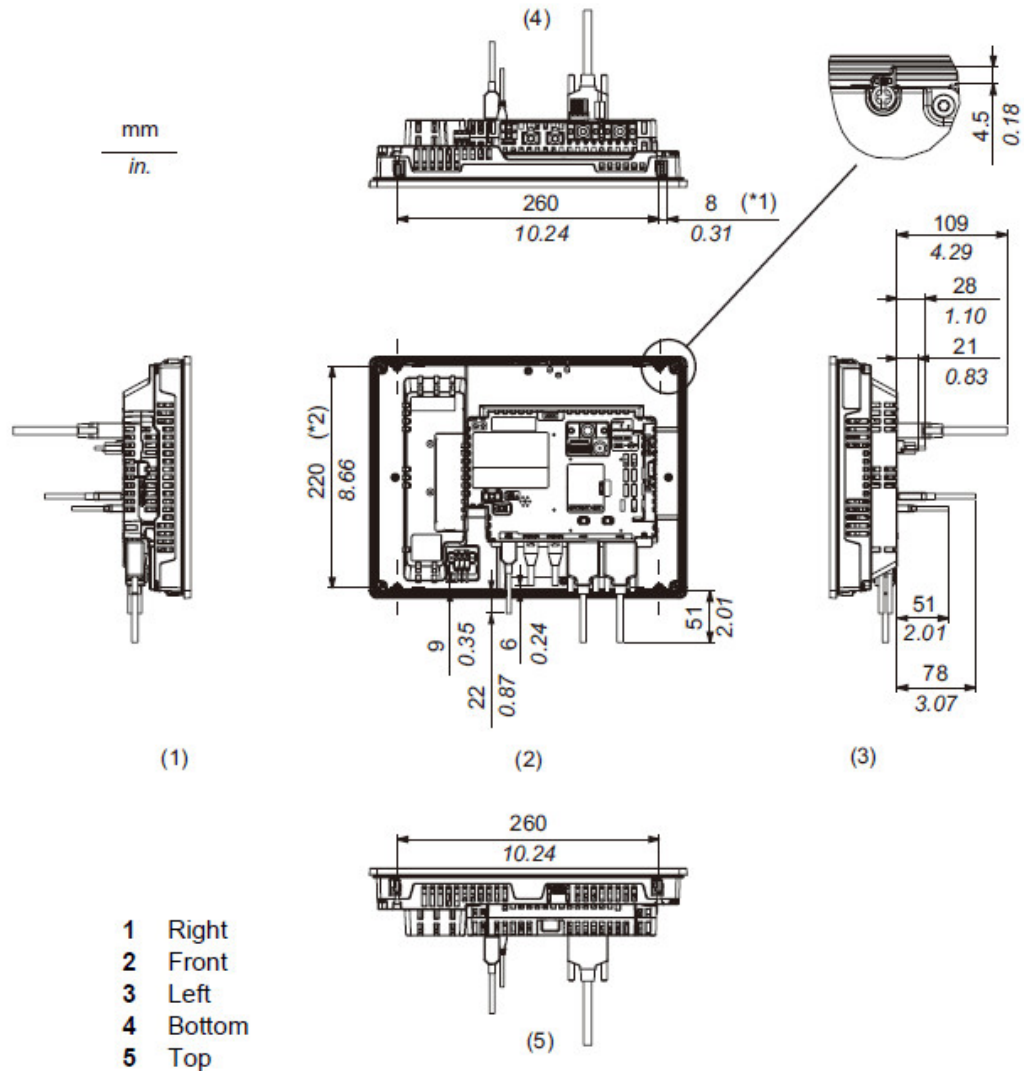

(Image of Open Box)

○ **GPL / LGPL License**

This product partially uses the open source licensed under public license such as GNU General Public License (GPL), GNU Lesser General Public License (LGPL).

As long as these open source, you have the right to get, modify and redistribute them.

WE PROVIDES THESE SOURCE CODE "AS IS" WITHOUT WARRANTY OF ANY KIND AND ALL SUCH WARRANTIES, EXPRESS OR IMPLIED, ARE HEREBY DISCLAIMED, INCLUDING, WITHOUT LIMITATION, WARRANTIES OF MERCHANTABILITY, FITNESS OR USEFULLNESS FOR ANY PARTICULAR PURPOSE, ACCURACY, AVAILABILITY, QUALITY OF THE SOURCE CODE, PERFORMANCE OR NON-INFRINGEMENT.

There is no guarantee by the copyright for these as the open source and we do not provide nor is obligated to provide support for the usage of these source code packages, but we guarantee this product under the condition described in this script.

You can refer to the following links about GPL / LGPL.

GPL: <https://gnu.org/licenses/gpl.html>

LGPL: <http://www.gnu.org/licenses/old-licenses/lgpl-2.1.html>
