

Lembar data produk

Spesifikasi



Controller M200 16I/O transistor Source

TM200C16T

Main

| | |
|-----------------------------|--|
| Range of product | Easy Modicon M200 |
| Product or component type | Logic controller |
| [Us] rated supply voltage | 24 V DC |
| Discrete I/O number | 16 |
| Discrete input number | I8: 1 regular input I2...I5: 4 fast input I0, I1, I6, I7: 4 high speed input |
| Discrete output number | Q2...Q6: 5 transistor output Q0...Q1: 2 fast output (PLS/PWM/PTO mode) |
| Discrete input voltage | 24 V |
| Discrete input voltage type | DC |
| Discrete input current | 7 mA for input |
| Discrete input logic | Sink or source (positive/negative) type 1 conforming to EN/IEC 61131-2 |
| Discrete output voltage | 24 V DC |
| Discrete output current | 0.5 A |
| Discrete output type | Transistor |
| Discrete output logic | Positive logic (source) |
| Power consumption in W | 15.5 W at 24 V DC (with max I/O) |

Complementary

| | |
|--|--|
| Maximum number of I/O expansion module | 4 with 135 discrete output(s) for transistor output 4 with 64 discrete output(s) for relay output |
| Supply voltage limits | 20.4...28.8 V |
| Inrush current | 35 A |
| Voltage state 1 guaranteed | ≥ 15 V for input |
| Voltage state 0 guaranteed | ≤ 5 V for input |
| Input impedance | 3.3 kOhm for discrete input |
| Response time | 1 ms turn-on, Q0...Q6 terminal(s) for output 1 ms turn-off, Q0...Q7 terminal(s) for output 5 μ s turn-off, I0, I1, I6, I7 terminal(s) for high speed input 5 μ s turn-on, I0, I1, I6, I7 terminal(s) for high speed input 100 μ s turn-off, I2...I5 terminal(s) for fast input 35 μ s turn-on, I2...I5 terminal(s) for fast input 100 μ s turn-off, I8 terminal(s) for regular input 35 μ s turn-on, I8 terminal(s) for regular input |

| | |
|---|---|
| Configurable filtering time | 0 ms for input 3 ms for input 12 ms for input |
| Maximum current per output common | 3.5 A at COM 0 |
| Output frequency | 100 kHz for fast output (PWM/PLS mode) at Q0...Q1 |
| Maximum leakage current | 0.1 mA for transistor output |
| Maximum voltage drop | <1 V |
| Maximum tungsten load | <12 W for output and fast output |
| Protection type | Overload and short-circuit protection at 2 A |
| Reset time | 1 s automatic reset |
| Memory capacity | 512 byte internal flash for backup of programs |
| Data storage equipment | 32 GB micro SD card (optional) |
| Battery type | BR2032 Li-CFx (Lithium-Carbon Monofluoride), battery life: 5 year(s) |
| Backup time | 3 years at 25 °C (by interruption of power supply) |
| Execution time for 1 KInstruction | 0.3 ms for event and periodic task |
| Execution time per instruction | 0.2 µs Boolean |
| Exct time for event task | 60 µs response time |
| Clock drift | <= 90 s/month at 25 °C |
| Regulation loop | Adjustable PID regulator up to 14 simultaneous loops |
| Positioning functions | PWM/PLS 2 channel(s) at 100 kHz |
| Control signal type | Quadrature (x1, x2, x4) at 100 kHz for fast input (HSC mode) Pulse/direction at 100 kHz for fast input (HSC mode) Single phase at 100 kHz for fast input (HSC mode) CW/CCW at 100 kHz for fast input (HSC mode) |
| Counting input number | 4 fast input (HSC mode) at 100 kHz 32 bits |
| Integrated connection type | USB port with mini B USB 2.0 connector Non isolated serial link serial 1 with terminal block connector and RS485 interface Non isolated serial link serial 2 with terminal block connector and RS232/RS485 interface Isolated serial link serial 2 with terminal block connector and RS485 interface |
| Transmission rate | 1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 15 m for RS485 1.2...115.2 kbit/s (115.2 kbit/s by default) for bus length of 3 m for RS232 12 Mbit/s for USB |
| Communication port protocol | USB port: USB - SoMachine-Network Non isolated serial link: Modbus master/slave - RTU/ASCII or SoMachine-Network |
| Local signalling | 1 LED (green) for PWR 1 LED (green) for RUN 1 LED (red) for module error (ERR) 1 LED (green) for SD card access (SD) 1 LED (red) for BAT 1 LED (green) for SL1 1 LED per channel (green) for I/O state |
| Electrical connection | Mini B USB 2.0 connector for a programming terminal removable screw terminal block for inputs removable screw terminal block for outputs removable screw terminal block, 3 terminal(s) for connecting the 24 V DC power supply removable screw terminal block, 4 terminal(s) for connecting the serial link 1 |
| Maximum cable distance between devices | Unshielded cable: <50 m for input Shielded cable: <10 m for fast input Shielded cable: <10 m for high speed input Unshielded cable: <150 m for output |
| Insulation | Non-insulated between inputs Between input and internal logic at 500 V AC Between fast input and internal logic at 500 V AC Between input groups at 500 V AC Between output and internal logic at 500 V AC Between output groups at 500 V AC Between supply and internal logic at 500 V DC |
| Marking | CE |

| | |
|-------------------------|---|
| Mounting support | Top hat type TH35-15 rail conforming to IEC 60715 Top hat type TH35-7.5 plate or panel with fixing kit conforming to IEC 60715 |
| Height | 90 mm |
| Depth | 70 mm |
| Width | 110 mm |
| Product weight | 0.365 kg |

Environment

| | |
|--|---|
| IP degree of protection | IP20 with protective cover in place |
| Standards | EN/IEC 61131-2 EN/IEC 61010-2-201 |
| Electromagnetic compatibility | Electrostatic discharge immunity test - test level: 8 kV (air discharge) conforming to EN/IEC 61000-4-2 Electrostatic discharge immunity test - test level: 6 kV (contact discharge) conforming to EN/IEC 61000-4-2 Susceptibility to electromagnetic fields - test level: 10 V/m (80 MHz...3 GHz) conforming to EN/IEC 61000-4-3 Magnetic field at power frequency - test level: 30 A/m conforming to EN/IEC 61000-4-8 Electrical fast transient/burst immunity test - test level: 2 kV (power lines) conforming to EN/IEC 61000-4-4 Electrical fast transient/burst immunity test - test level: 2 kV (relay output) conforming to EN/IEC 61000-4-4 Electrical fast transient/burst immunity test - test level: 1 kV (I/O) conforming to EN/IEC 61000-4-4 Electrical fast transient/burst immunity test - test level: 1 kV (serial link) conforming to EN/IEC 61000-4-4 1.2/50 µs shock waves immunity test - test level: 1 kV (power lines (DC)) conforming to EN/IEC 61000-4-5 1.2/50 µs shock waves immunity test - test level: 2 kV (power lines (AC)) conforming to EN/IEC 61000-4-5 1.2/50 µs shock waves immunity test - test level: 2 kV (relay output) conforming to EN/IEC 61000-4-5 1.2/50 µs shock waves immunity test - test level: 1 kV (I/O) conforming to EN/IEC 61000-4-5 1.2/50 µs shock waves immunity test - test level: 1 kV (shielded cable) conforming to EN/IEC 61000-4-5 1.2/50 µs shock waves immunity test - test level: 0.5 kV (power lines (DC)) conforming to EN/IEC 61000-4-5 1.2/50 µs shock waves immunity test - test level: 1 kV (power lines (AC)) conforming to EN/IEC 61000-4-5 Conducted RF disturbances - test level: 10 V (0.15...80 MHz) conforming to EN/IEC 61000-4-6 Conducted emission - test level: 79 dBµV/m QP/66 dBµV/m AV (power lines (AC)) conforming to EN/IEC 55011 Conducted emission - test level: 73 dBµV/m QP/60 dBµV/m AV (power lines (AC)) conforming to EN/IEC 55011 Radiated emission - test level: 40 dBµV/m QP class A (10 m) conforming to EN/IEC 55011 Radiated emission - test level: 47 dBµV/m QP class A (10 m) conforming to EN/IEC 55011 |
| Shock resistance | 15 gn for 11 ms 30 gn for 6 ms |
| Immunity to microbreaks | 2 ms |
| Vibration resistance | 3.5 mm at 5...8.4 Hz on symmetrical rail 1 gn at 8.4...150 Hz on symmetrical rail 3.5 mm at 5...8.7 Hz on panel mounting 2 gn at 8.7...150 Hz on panel mounting |
| Relative humidity | 10...95 %, without condensation (in operation) 10...95 %, without condensation (in storage) |
| Ambient air temperature for operation | 0...55 °C (horizontal installation) |
| Ambient air temperature for storage | -25...70 °C |
| Pollution degree | <= 2 |
| Operating altitude | 0...2000 m |
| Storage altitude | 0...3000 m |

Packing Units

| | |
|-------------------------------------|---------|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Height | 13.6 cm |
| Package 1 Width | 9 cm |
| Package 1 Length | 11.8 cm |


| | |
|------------------------------|----------|
| Package 1 Weight | 517 g |
| Unit Type of Package 2 | S03 |
| Number of Units in Package 2 | 18 |
| Package 2 Height | 30 cm |
| Package 2 Width | 30 cm |
| Package 2 Length | 40 cm |
| Package 2 Weight | 9906 g |
| Unit Type of Package 3 | P12 |
| Number of Units in Package 3 | 432 |
| Package 3 Height | 80 cm |
| Package 3 Width | 120 cm |
| Package 3 Length | 105 cm |
| Package 3 Weight | 246744 g |

Offer Sustainability

| | |
|----------------------------|---|
| Sustainable offer status | Green Premium product |
| REACH Regulation | REACH Declaration |
| EU RoHS Directive | Pro-active compliance (Product out of EU RoHS legal scope) EU RoHS Declaration |
| Mercury free | Yes |
| China RoHS Regulation | China RoHS declaration |
| RoHS exemption information | Yes |
| Environmental Disclosure | Product Environmental Profile |
| Circularity Profile | End of Life Information |
| WEEE | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |


Dimensions Drawings

Dimensions

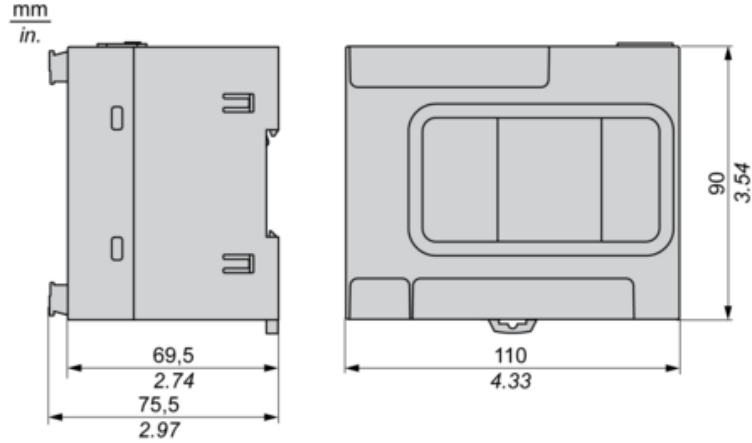


Mounting and Clearance


Mounting on a Rail






Direct Mounting on a Panel Surface

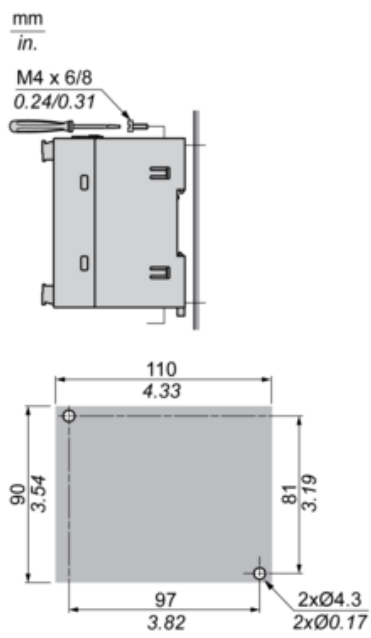



Mounting Position

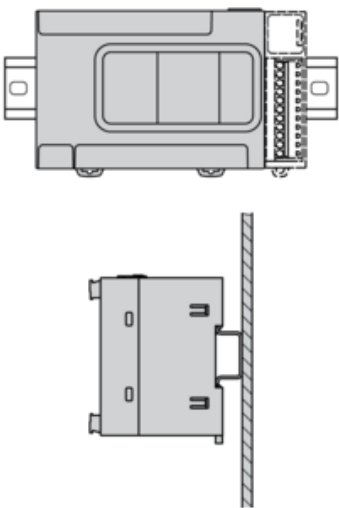




Clearance


mm
in.


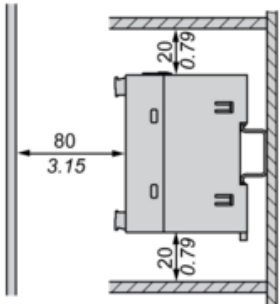
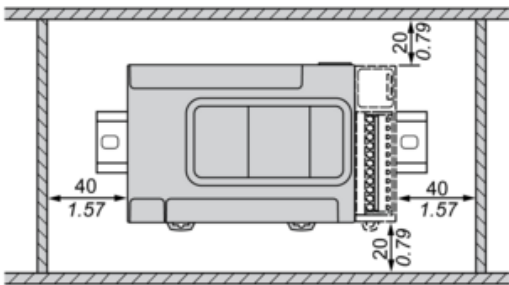


TMCR2...Installation

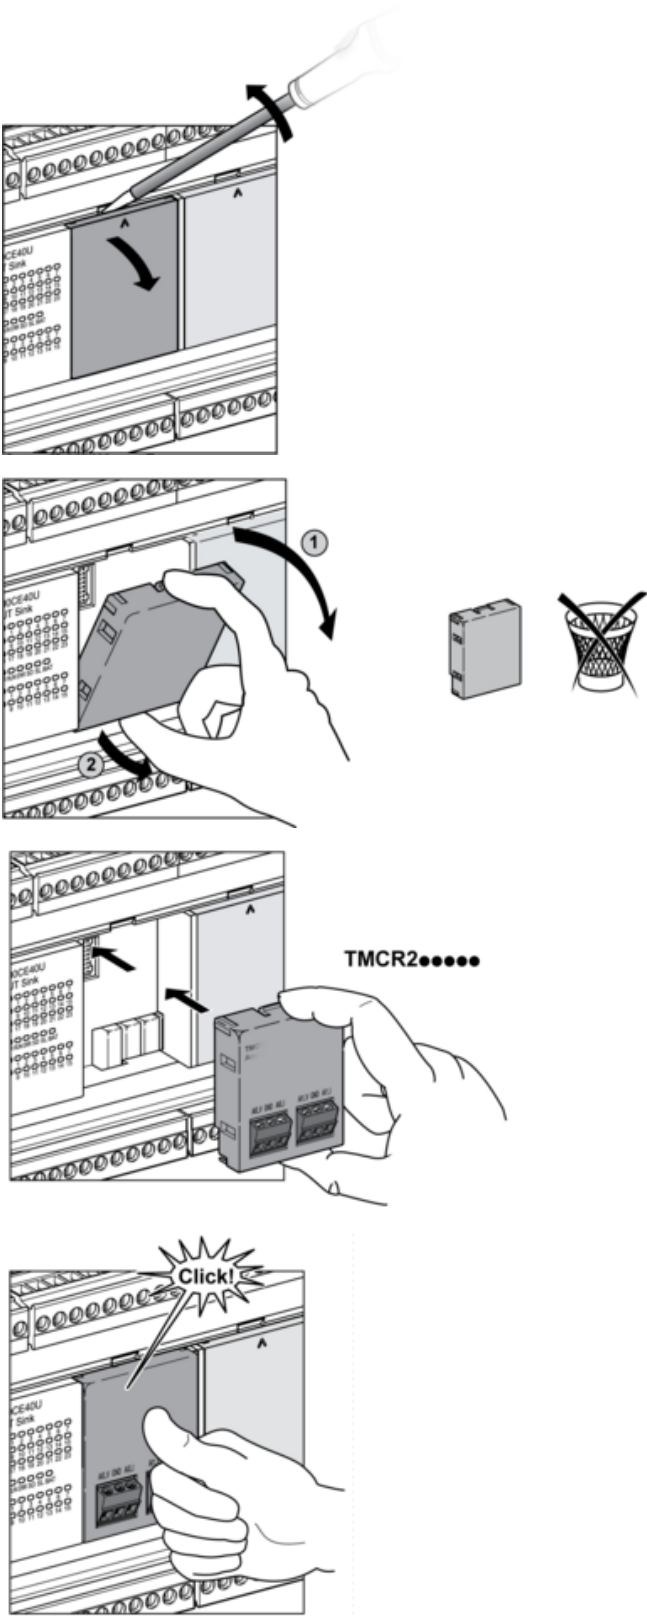


TMCR2... De-Installation

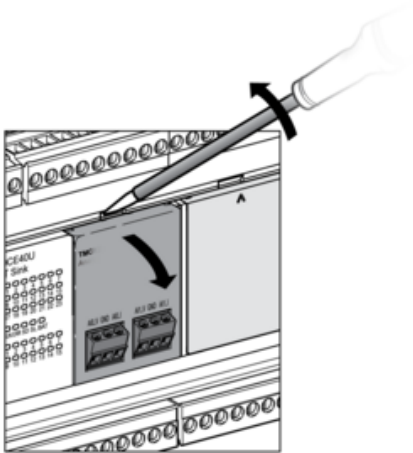

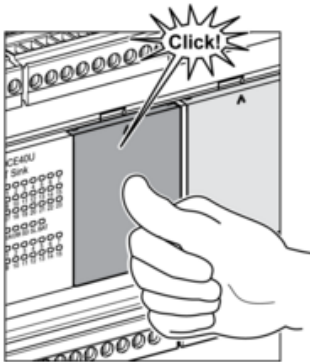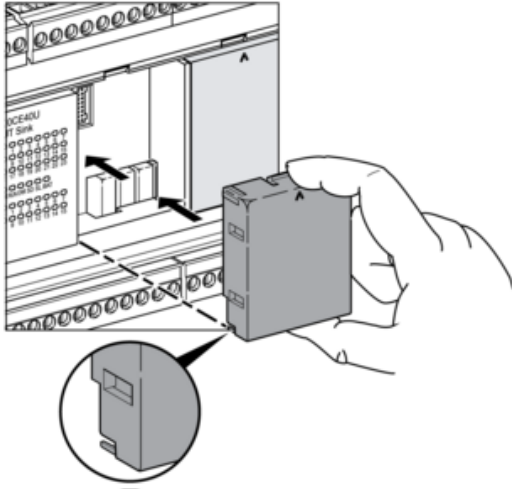


Wiring Diagram / Connections Schema


DC Power Supply



Digital Inputs (Sink or Source)

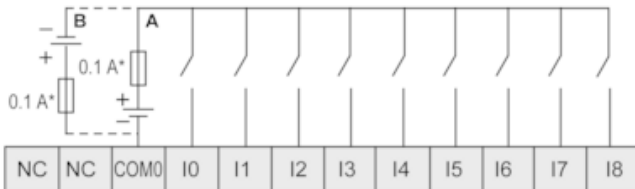

** I0...I8




(*) Type T fuse

(**) Fast inputs


A Sink wiring (positive logic)

B Source wiring (negative logic)

Regular and Fast Transistor Output

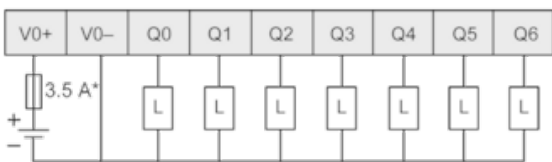


** Q0...Q6




(*) Type T fuse

(**) Fast outputs

USB Mini-B Connection

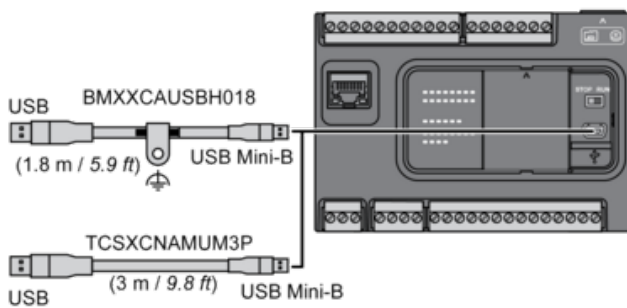

SL1 Connection

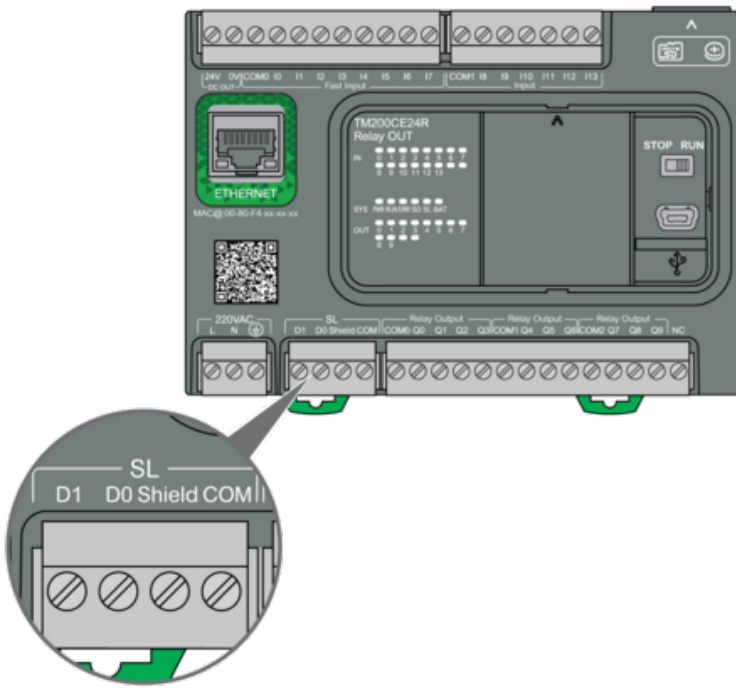

Penggantian yang disarankan