

Master Value LEDtube T8

MASTER LEDtube VLE 1200mm UO 15.5W 865 T8

A high performance LED solution, the professional Master Value LED tube is ideal for replacing T8 fluorescent lamps using EM ballast or installing directly on the mains. This product provides a uniform lighting effect for use in all general lighting, as well as instant energy efficiency, making for an environmentally friendly solution.

Product data

General Information		Power (Nom)	
Cap-Base	G13 [Medium Bi-Pin Fluorescent]		15.5 W
EU RoHS compliant	Yes	Lamp Current (Max)	73 mA
Nominal Lifetime (Nom)	60000 h	Lamp Current (Min)	67 mA
Switching Cycle	200000X	Starting Time (Nom)	0.5 s
Flux measurement reference	Sphere	Warm Up Time to 60% Light (Nom)	0.5 s
		Power Factor (Nom)	0.9
		Voltage (Nom)	220-240 V
Light Technical		Temperature	
Color Code	865 [CCT of 6500K]	T-Ambient (Max)	45 °C
Beam Angle (Nom)	190 °	T-Ambient (Min)	-20 °C
Luminous Flux (Nom)	2500 lm	T-Storage (Max)	65 °C
Color Designation	Cool Daylight	T-Storage (Min)	-40 °C
Correlated Color Temperature (Nom)	6500 K	T-Case Maximum (Nom)	60 °C
Luminous Efficacy (rated) (Nom)	161.00 lm/W		
Color Consistency	<6	Controls and Dimming	
Color Rendering Index (Nom)	80	Dimmable	No
LLMF At End Of Nominal Lifetime (Nom)	70 %		
Operating and Electrical		Mechanical and Housing	
Input Frequency	50 to 60 Hz	Bulb Finish	Frosted


Master Value LEDtube T8

Bulb Material	Glass
Product Length	1200 mm
Bulb Shape	Tube, double-ended
Approval and Application	
Energy Efficiency Class	C
Energy Saving Product	Yes
Approval Marks	RoHS compliance TUV CE marking KEMA Keur certificate
Energy Consumption kWh/1000 h	16 kWh
EPREL Registration Number	403666

Product Data

Full product code	871951431684300
Order product name	MASTER LEDtube VLE 1200mm UO 15.5W 865 T8
EAN/UPC - Product	8719514316843
Order code	929002997802
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10
Material Nr. (12NC)	929002997802
Net Weight (Piece)	0.215 kg



Dimensional drawing

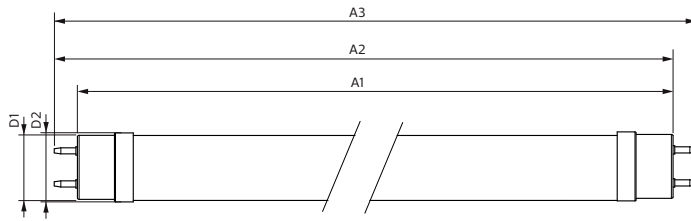

Product	D1	D2	A1	A2	A3
MASTER LEDtube VLE 1200mm UO 15.5W 865 T8	25.8 mm	28 mm	1198.2 mm	1205.3 mm	1212.4 mm

TLED T8 220-240V 15.5-36W 2500lm 6500K

Photometric data

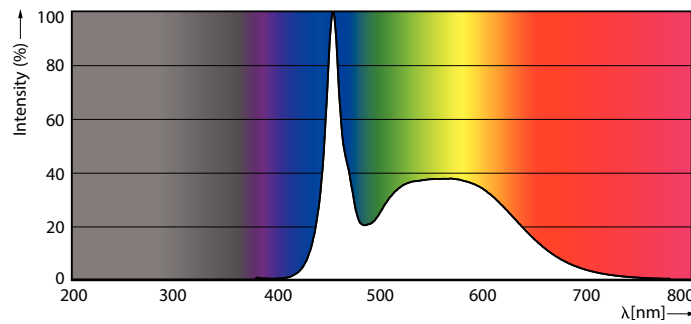


LEDtube MAS 15,5W G13 2500lm 865

LEDtube MAS 15,5W G13 2500lm 865


Master Value LEDtube T8

Photometric data

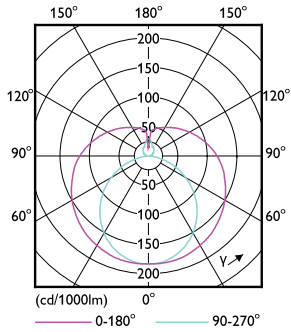


LEDtube MAS 15,5W G13 2500lm


Lifetime

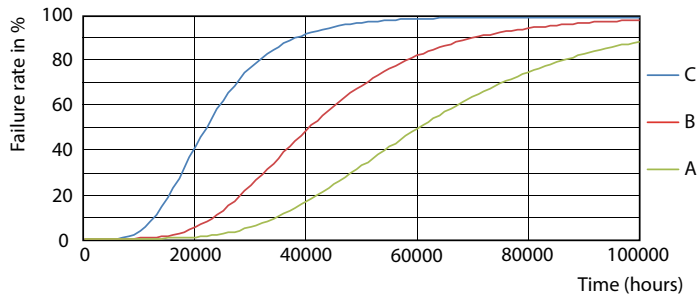


LEDtube_60K_FailureRate

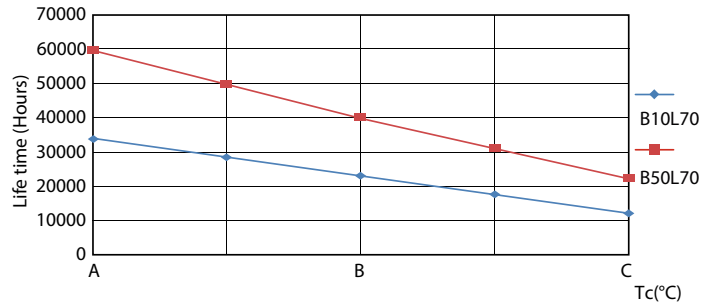

LEDtube_60K_LifetimeVsTc

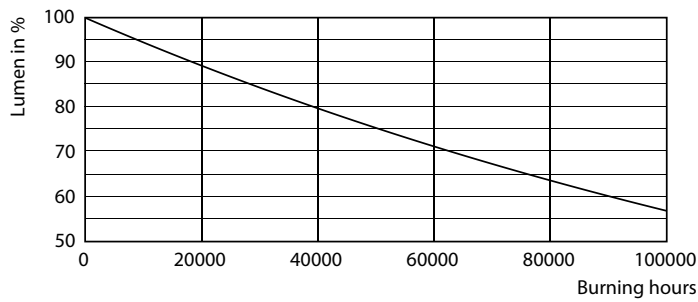


LEDtube_60K

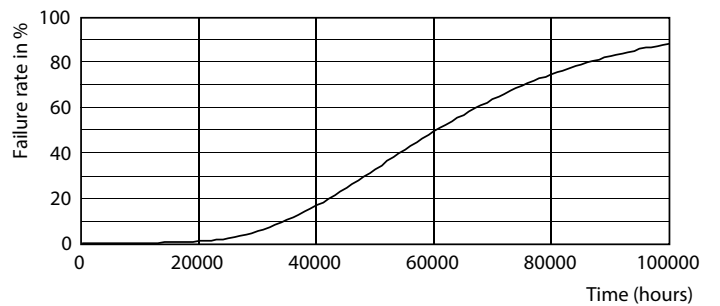

LEDtube_60K

Master Value LEDtube T8

Lifetime

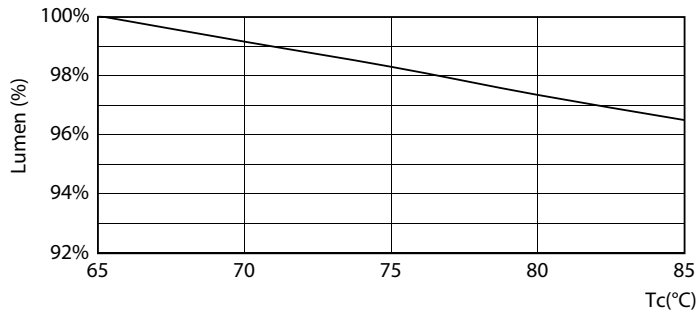

LEDtube MAS 15,5W 60K LumenVsTc

