





Product designation	MODULAR CONTACTOR		
Product type designation	CN		
Operating voltage type	AC/DC		
Number of poles	2		
Number of DIN modules	1		
Electrical features			
IEC Conventional free air thermal current I _{th}	A	20	
Operational current AC1 and AC-7a ≤400V	A	20	
Operational current AC3 and AC-7b ≤400V	A	9	
Rated insulation voltage U _i IEC/EN	V	440	
Rated impulse withstand voltage U _{imp}	kV	4	
Minimum switching capacity		≥17V ≥50mA	
Power dissipation per pole (average value) I _{th}	W	1.7	
Control circuit			
Auxiliary rated supply voltage U _s		220VAC/VDC	
Auxiliary contacts			
	NO	Nr.	2
Average coil consumption ≤20°C			
	in-rush	W	2.5
	holding	W	2.5
Operating voltage			
	pick-up		
		min	%U _s 85
		max	%U _s 110
	drop-out		
		min	%U _s 20
		max	%U _s 75
Operating times			
Average time			
	Closing NO		
		min	ms 15
		max	ms 45
	Opening NO		
		min	ms 25
		max	ms 50
Operations			
Mechanical life		cycles	3000000
Electrical life AC3		cycles	300000
Electrical life AC1		cycles	200000
Ambient conditions			
Operating temperature			
		min	°C -25
		max	°C +70
Storage temperature			

	min	°C	-30
	max	°C	80
Max altitude		m	2000
Mechanical features			
Fixing			DIN rail 35mm
Tightening torque for coil terminal	max	Nm	0.6
	max	lbin	0.6
Tightening torque for terminals	max	Nm	1.2
	max	lbin	0.9
Conductor section			
	Coil terminal		
	min	mm ²	1
	max	mm ²	2.5
	Power terminal		
	min	mm ²	1
	max	mm ²	10
Terminals tool			PZ2
Weight		g	135
Resistance & Protection			
Frontal IP degree			IP20
Pollution degree			3
Dimensions [mm (in)]			

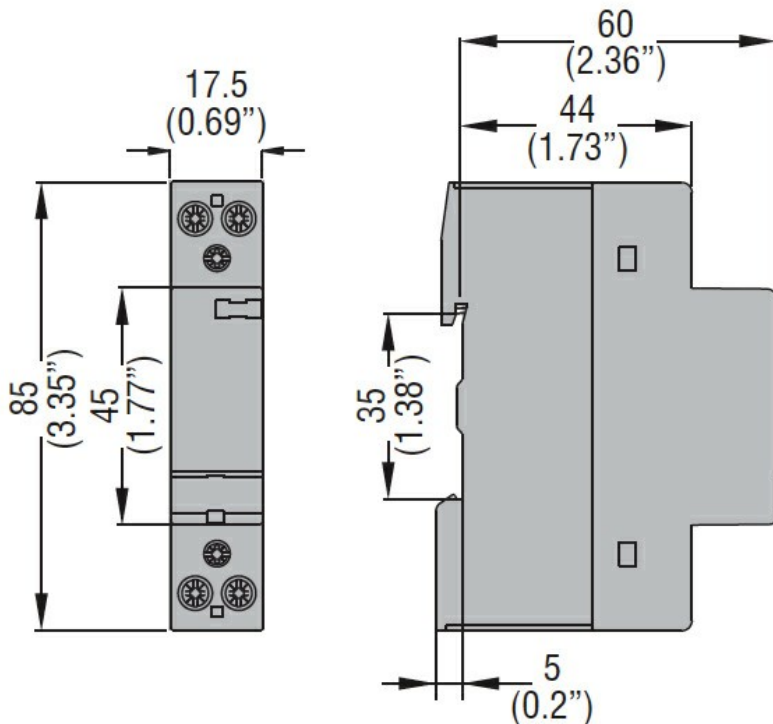

Wiring diagrams



Certifications and compliance

Compliance

IEC/EN 60947-1

IEC/EN 60947-4-1

IEC/EN 60947-5-1

IEC/EN 61095

Certificates

EAC

ETIM classification

ETIM 8.0

EC000066 -
Power contactor,
AC switching