



Product designation	MODULAR CONTACTOR			
Product type designation	CNM			
Operating voltage type	AC/DC			
Manual control	YES			
Number of poles	4			
Number of DIN modules	2			
<b>Electrical features</b>				
IEC Conventional free air thermal current I <sub>th</sub>	A	32		
Operational current AC1 and AC-7a ≤400V	A	32		
Operational current AC3 and AC-7b ≤400V	A	8.5		
Rated insulation voltage U <sub>i</sub> IEC/EN	V	440		
Rated impulse withstand voltage U <sub>imp</sub>	kV	4		
Minimum switching capacity	≥17V ≥50mA			
Power dissipation per pole (average value) I <sub>th</sub>	W	2.5		
<b>Control circuit</b>				
Auxiliary rated supply voltage U <sub>s</sub>	220VAC/VDC			
Auxiliary contacts	NO	Nr.	4	
Average coil consumption ≤20°C	in-rush	W	3	
	holding	W	3	
Operating voltage	pick-up	min	%U <sub>s</sub>	85
		max	%U <sub>s</sub>	110
	drop-out	min	%U <sub>s</sub>	20
		max	%U <sub>s</sub>	75
<b>Operating times</b>				
Average time	Closing NO	min	ms	15
		max	ms	45
	Opening NO	min	ms	20
		max	ms	70
<b>Operations</b>				
Mechanical life	cycles	3000000		
Electrical life AC3	cycles	500000		
Electrical life AC1	cycles	150000		
<b>Ambient conditions</b>				
Operating temperature	min	°C	-25	
	max	°C	+70	

Storage temperature

min	°C	-30
max	°C	80

Max altitude

m	2000
---	------

Mechanical features

Fixing

DIN rail 35mm

Tightening torque for coil terminal

max	Nm	0.6
max	lbin	0.6

Tightening torque for terminals

max	Nm	1.2
max	lbin	0.9

Conductor section

Coil terminal

min	mm <sup>2</sup>	1
max	mm <sup>2</sup>	2.5

Power terminal

min	mm <sup>2</sup>	1
max	mm <sup>2</sup>	10

Terminals tool

PZ2

Weight

g 260

Resistance & Protection


Frontal IP degree

IP20


Pollution degree

3

Dimensions [mm (in)]

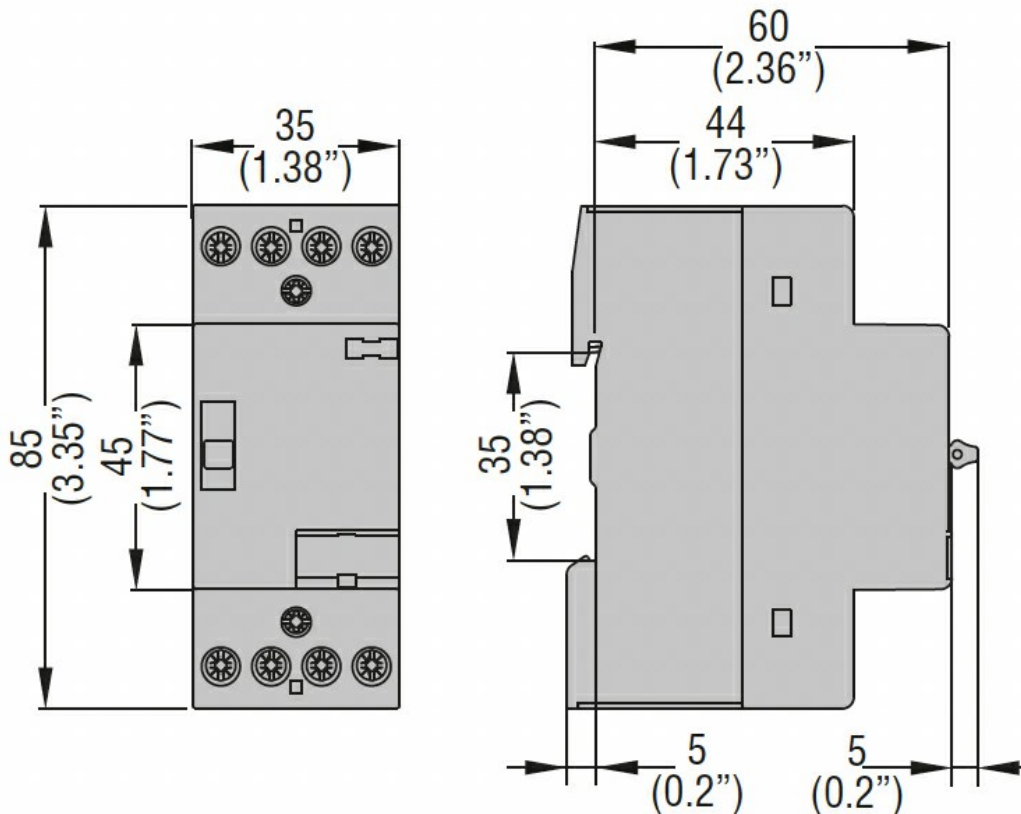

Wiring diagrams



### Certifications and compliance

#### Compliance

IEC/EN 60947-1

IEC/EN 60947-4-1

IEC/EN 60947-5-1

IEC/EN 61095

#### Certificates

EAC

### ETIM classification

ETIM 8.0

EC000066 -  
Power contactor,  
AC switching