


## Combination arrester, 3-pole with function display




Combination arrester set, type 1+2, 3-pole, with visual function display, for use in TN-C networks:

Completely pre-terminated and ready for connection, consisting of:  
3 x MCD 50-B-OS: Type 1+2 coordinated lightning current arrestors to DIN EN 61643-11. For interface 0 to 2 (LPZ) in accordance with lightning protection zone concept to IEC 61312-1 and/or VDE 0185-305.

- Lightning protection equipotential bonding to VDE 0185-305 (IEC 62305)
- Lightning current arresting capacity to 50 kA (10/350) per pole and up to 150 kA (10/350) in total
- Protection level < 1.7 kV allows device protection
- Short-circuit resistance 10 kA, arrester backup fuse to 500 A gL/gG
- Power consumption < 26 mW/pole
- Suitable for use in pre-meter area according to the VDEW directive
- Encapsulated, non-extinguishing spark gaps


### Dimensions

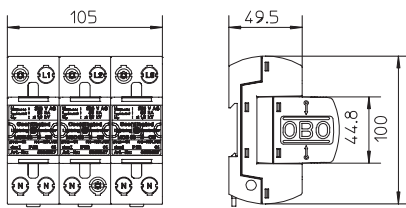

Application: Industrial systems and buildings with external lightning protection of Classes I to IV.

Type	Highest Version continuous voltage V	Pack. pcs	Weight kg/100 pcs.	Item No.
MCD 50-B 3-OS	255   3-pole	1	118,000	5096835

### Connection options



### MCD 50-B 3-OS

Nominal voltage V	$U_N$	230
SPD to EN 61643-11		—
SPD to IEC 61643-11		Type 1+2
Lightning protection zone LPZ		Class I+II
Lightning protection zone LPZ		0→2
Impulse discharge current (10/350) kA	$I_{imp}$	50
Total discharge current (10/350) kA	$I_{total}$	150
Nominal discharge current (8/20) kA	$I_n$	50
Arrester surge current (8/20) [total] kA	$I_{total 8/20}$	150
Voltage protection level kV	$U_p$	< 1.7
Response time ns	$t_A$	< 100
Follow current quenching capacity leff kA	$I_{eff}$	10
Maximum back-up fuse A		500
Temperature range °C	$\vartheta$	-40+85
Division unit TE (17.5 mm)		6
Protection rating		IP20
Approvals		VDE
Connection cross-section rigid mm <sup>2</sup>		10-50
Connection cross-section, multi-wire mm <sup>2</sup>		10-35
Connection cross-section, flexible mm <sup>2</sup>		10-25