


FLP-12,5 V/4

pluggable module, visual fault signalling, module locking


- four-pole varistor lightning current arrester
- installation at the boundary of zones LPZ 0 and LPZ 1 or higher, for objects in LPL III and IV
- for protection against impact of partial lightning currents, induced overvoltages during a lightning strike or switching overvoltages



Product dimensions

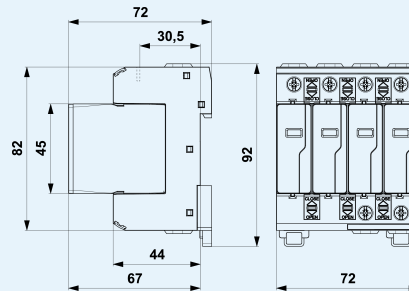

Basic circuit diagram



Technical parameters

Parameter name	Parameter value	
Type of SPD	T1,T2	
Mounting	DIN rail 35 mm	
Nominal voltage	U_n	230 V AC
Maximum operating voltage	U_c	275.00 V AC
Maximum operating voltage	U_c	350.00 V DC
Type of network	TN	
Maximum overcurrent protection	160 A gL/gG	
Short-circuit current rating	I_{SCCR}	50.0 kA
Total discharge current (10/350 μ s)	$I_{Total(10/350)}$	50.00 kA
Lightning impulse current (10/350 μ s)	I_{imp}	12.50 kA
Nominal discharge current (8/20 μ s)	I_n	30.00 kA
Maximum discharge current (8/20 μ s)	I_{max}	60.00 kA
Voltage protection level	U_p	1.50 kV
Voltage protection level at 5 kA	U_p	0.90 kV

Response time	t_a	25 ns
TOV 5 s L-N		335 V
TOV characteristic (TOV 5 s)		withstand
Cross-section of connected conductors solid (min)		1.00 mm ²
Cross-section of connected conductors solid (max)		35.00 mm ²
Cross-section of connected conductors stranded (min)		1.00 mm ²
Cross-section of connected conductors stranded (max)		25.00 mm ²
Fault indication		red indication field
Degree of protection		IP 20
Range of ambient temperatures (min/max)		-40 / 80 °C
Humidity		5 - 95 %
According to standard		EN 61643-11:2012, IEC 61643-11:2011
ETIM Class		EC001457
Plug module		FLP-12,5 V/0
Customs tariff number		85363090
EAN		8595090534297